


BOLT SERIES

INSTALLATION GUIDE
DOWNLIGHT STEM

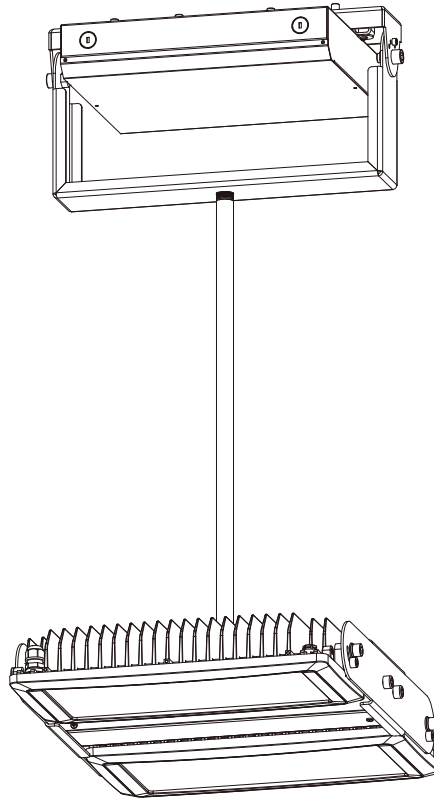


IMPORTANT SAFETY INFORMATION

READ AND FOLLOW ALL SAFETY INSTRUCTIONS


**FOR FIELD ASSISTANCE PLEASE CALL
+1-213-255-2060 #4**

- Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker.
- All servicing or relamping must be performed by qualified service personnel.
- Product must be grounded to avoid potential electric shock or other potential hazard.
- Product must be installed at locations and heights, in a manner consistent with its intended use, and in compliance with electrical code and local codes.

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

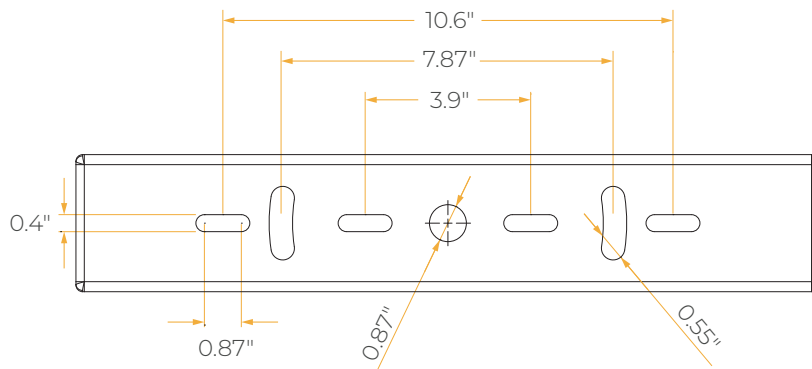


DIMENSION

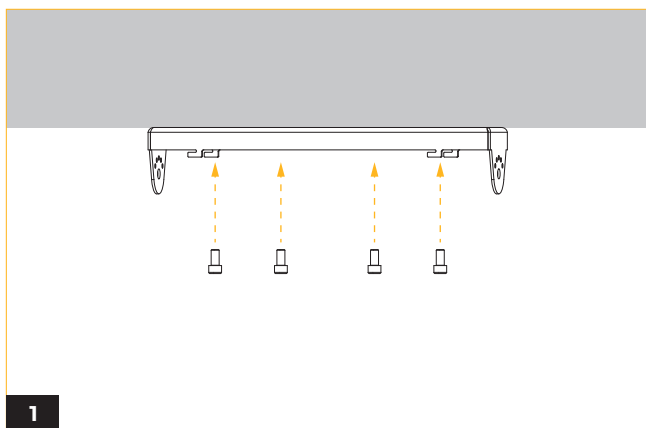


1

Secure bracket to a level surface with mounting hardware that is sufficient to support weight of the fixture and power box.

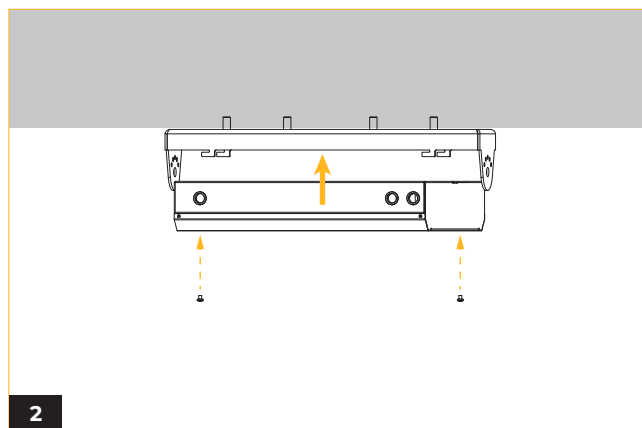


2

Slip the power box over the lock-in grooves on the bracket and fasten screws on either side to keep the power box in place.

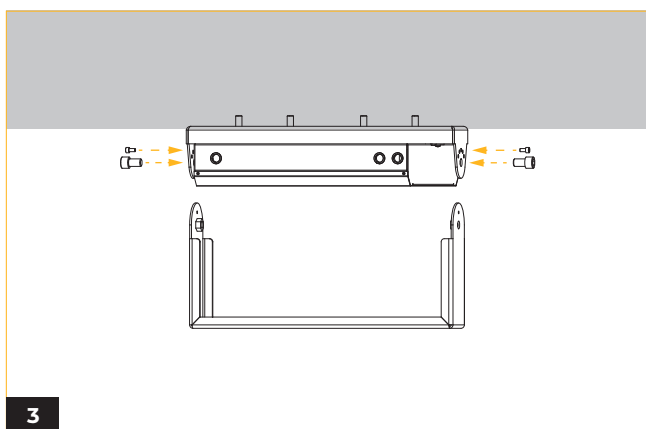


3

Bring up Bracket Mount and secure in place with provided nuts.

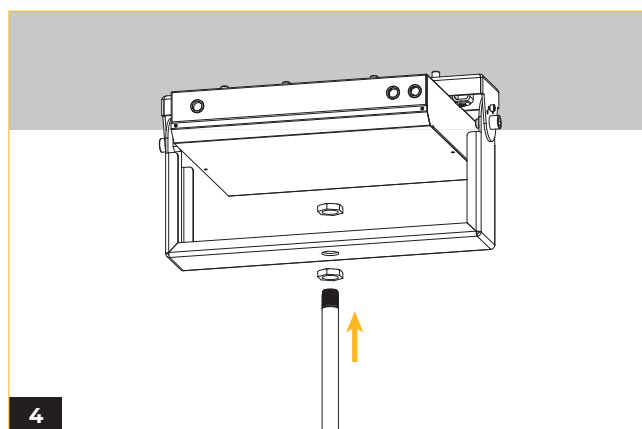

4


Thread stem mount through bracket mount opening and secure in place using hex nut on opposite side.

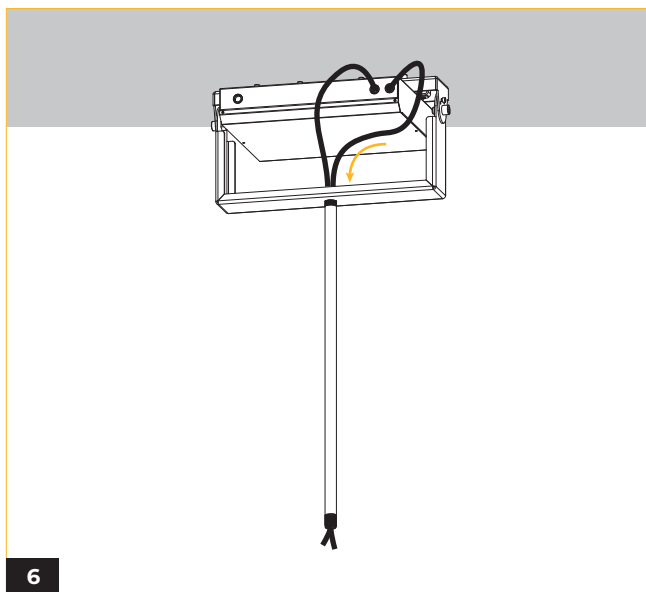


6 Insert both cables from powerbox through the stem mount.




7 Open twin lighthouse junction box to expose stem opening.

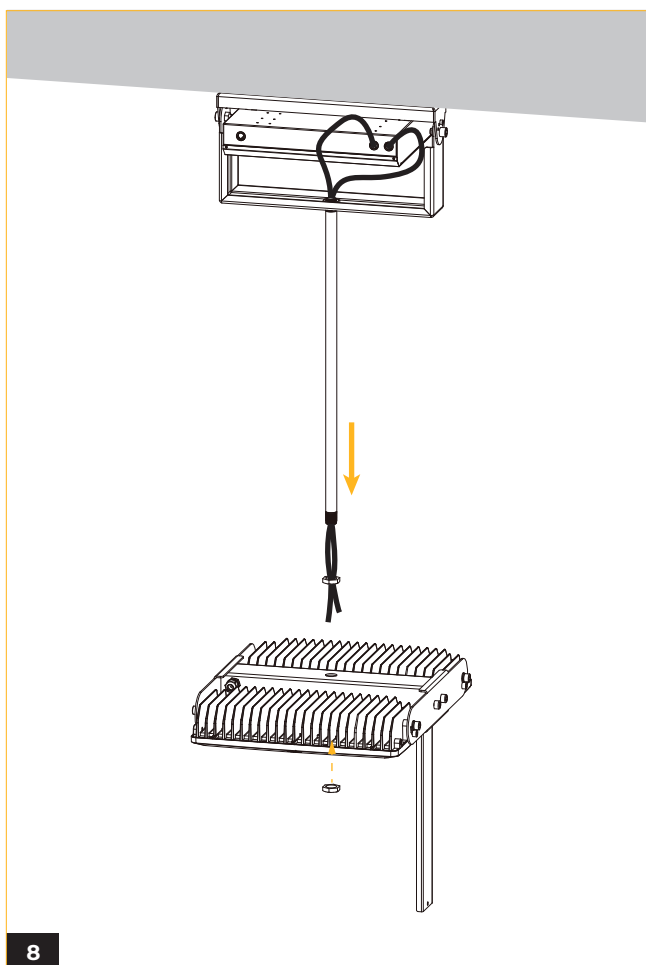

8 Bring light head and stem mount together by fastening cables and stem through junction box opening.

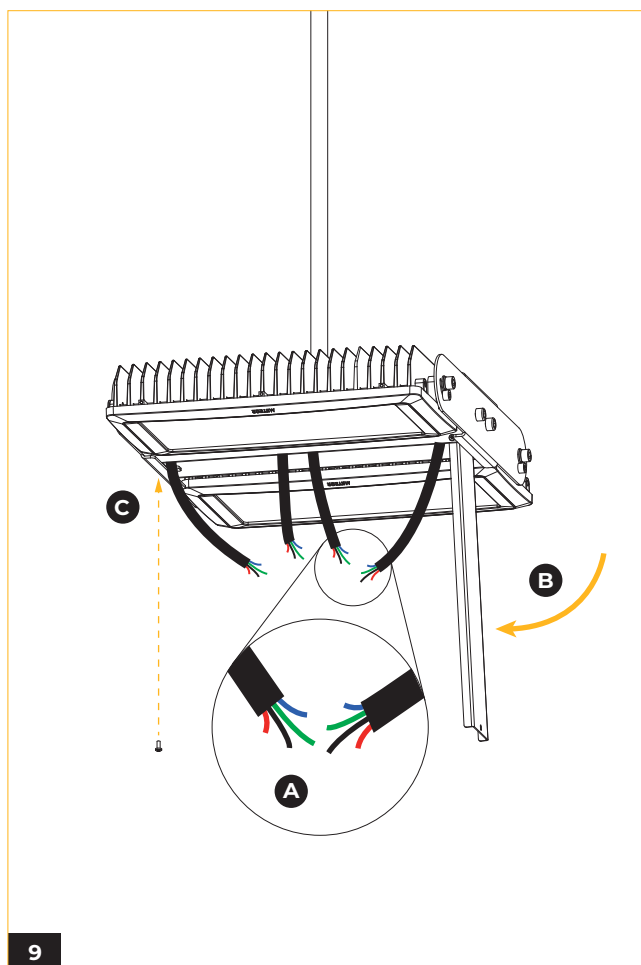


9 Make electrical connections as per wiring diagram, and close junction box enclosure.

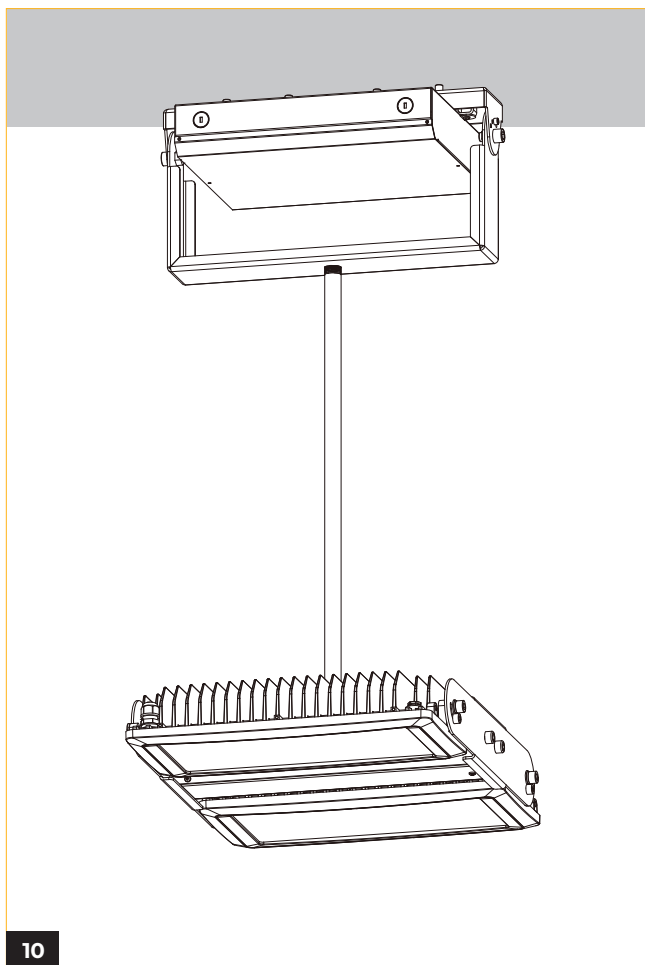

WIRING DIAGRAM

NOD (Non Dimming)

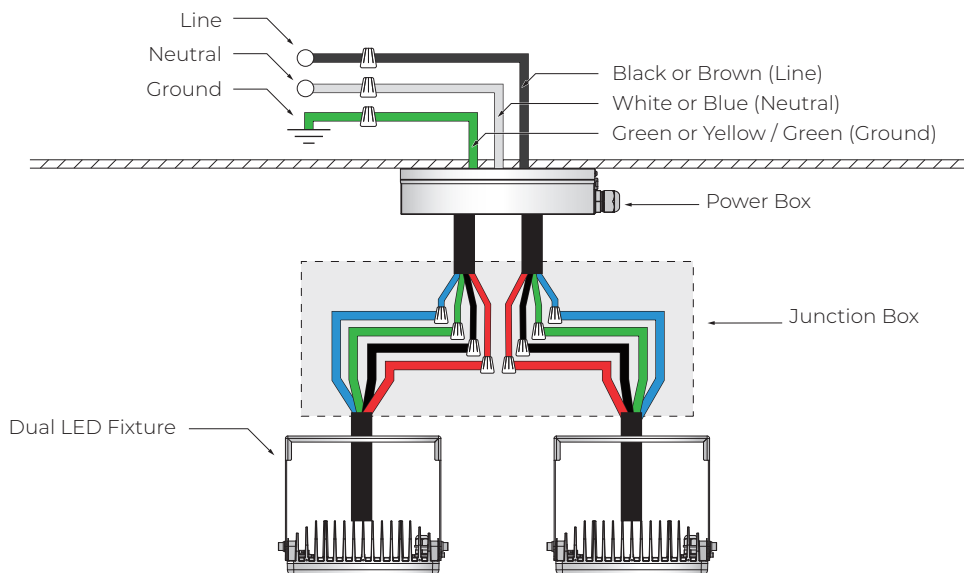

STV 1-10V

