

WHIZ 2.0

SLEEK AND ARCHITECTURAL
HIGH CEILING SOLUTION

Housing

Diameter : Ø16.24" | Height : 4.4" | Weight : 33 lbs

Material

Housing : High Pressure Die-Cast Aluminum

Lens : High transmittance clear tempered glass

Power Input

150W, 300W | 120-277V, 347-480V

Lumen Output

20,980 lm (150W), 29,555 lm (300W)

Dimming

Superior 0-10V : Dims to 1%

DMX : High resolution dims to 0.1%

Color Quality

CRI 75, CRI 85

Rated Life

> 100,000 Hours (L70)

Finish



Black



White

Color Temperature



ColorFlip™ Tunable White
3000K ↔ 5000K

Optics



25°



40°



60°



WIDE

Warranty

5 Year limited warranty

Listing




METEOR

SPECIFICATION SHEET
TUNABLE WHITE

Designed For The Ones Who Expect The Extraordinary.

The Whiz 2.0 redefines high ceiling design, with a High Bay look that is unlike any other. This architectural fixture is suitable for mounting heights of 30ft and above and delivers high performance as well as clean aesthetics.

The Whiz 2.0 can be configured for both direct and indirect lighting, is available in Wet Location listed ratings, as well as Colorflip™ color-changing technologies.

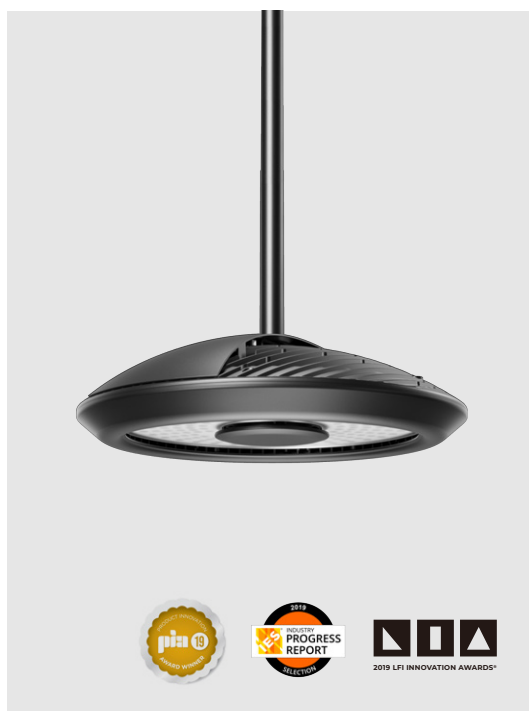

meteor-lighting.com

SPECIFICATION SHEET / TUNABLE WHITE

WHIZ 2.0

SLEEK AND ARCHITECTURAL
HIGH CEILING SOLUTION

METEOR

SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

| | | | | |
|------------|--------------------|--|---|---|
| WS2 | MODEL | WHIZ 2.0 TUNABLE WHITE | | |
| | WATTAGE | 150 150W | 300 300W | |
| TNW | CCT / CRI | TNW 3000K-5000K | | |
| | VOLTAGE | UNV 120-277V | HVT 347-480V | |
| | DIMMING | SPV Superior 0-10V dims to 1% | DMX DMX dims to 0.1% (XLR Sockets) | DMXR DMX dims to 0.1% (RJ45 Sockets) |
| | BEAM ANGLE | 25 25° WD¹ Wide (With Diffuser) | 40 40° | 60 60° |
| | FINISH | BLK Black | WHT White | |
| | MOUNTING | ST2 Stem 2ft UP2 Uplight Stem 2ft AUP4 Adjustable Uplight 4ft | ST4 Stem 4ft UP4 Uplight Stem 4ft | AD10 Adjustable Cable 10ft AUP2 Adjustable Uplight 2ft |
| | ACCESSORIES | EMP² Remote Emergency Pack SNT⁵ Snoot | DF³ Diffuser GSV⁶ Glare Shield Visor | WG⁴ Wire Guard |

 **CLEAR FORM**

¹ Please factor in change in lumen output with WD -20%

² EMP option is not compatible with 300W version or HVT voltage

³ Please factor in change in lumen output with diffuser (-20% with WD; -12% with other degrees)

⁴ Please factor in change in lumen output of -14%

⁵ Please factor in change in lumen output of -30%

⁶ Please factor in change in lumen output of -25%

TECHNICAL DETAILS

Electrical

- 20,980 lm (150W)
- 29,555 lm (300W)
- Power Input : 120-277V, 347-480V
- Operating Temperature : -40°F~112°F
- Surge Protection : Built-in is 4KV
- Emergency Pack with Mounting Plate: Philips Bodine BSL20B2UEK55C111
- Power Factor Greater than 0.9

LED Features

- ColorFlip™ Tunable White 3000K ↔ 5000K
- CRI 75, CRI 85
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs
- Lumen Maintenance > 0.90 at 60,000 hours

Optics

- Beam Angle : 25°, 40°, 60°, WD (With diffuser)

Advanced Dimming

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting
- Superior 0-10V : Two channel 0-10V, dimming to 1% (1 controls intensity, 1 controls CCT)
- DMX : High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

Housing

- Diameter : Ø16.24"
- Height : 4.4"
- Weight : 33 lbs
- Material : High Pressure Die-Cast Aluminum, Tempered Glass
- IK07

Mounting

- Stem Mount 2ft or 4ft
- Adjustable Cable 10ft
- Uplight Mount 2ft, 4ft
- Adjustable Uplight Mount 2ft, 4ft

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- CE
- UKCA
- FCC

PERFORMANCE SUMMARY*

| ColorFlip™ | 3000K | 3500K | 4000K | 4500K | 5000K |
|------------------------------|----------|----------|----------|----------|----------|
| DMX CCT Signal (%) | 0% | 25% | 45% | 60% | 100% |
| 0-10V CCT Voltage | 0 | 2.5 | 4.5 | 6 | 10 |
| 150W | 17,165lm | 19,070lm | 20,980lm | 20,805lm | 20,630lm |
| 300W | 24,100lm | 26,830lm | 29,555lm | 29,545lm | 29,540lm |
| CRI | 85 | 83 | 82 | 80 | 75 |


*Tolerance±8%

| Emergency Pack Lumen Output Table | |
|-----------------------------------|---------|
| CCT | 4000K |
| LUMEN | 1,980lm |

| Current Consumption | | | | |
|---------------------|-------|-------|-------|-------|
| WATTAGE / VOLT | 120V | 277V | 347V | 480V |
| 150W | 1.34A | 0.60A | 0.48A | 0.34A |
| 300W | 2.75A | 1.19A | 0.95A | 0.69A |

PHOTOMETRICS

Below is a typical photometric representation of the Whiz 2.0 fixture. Please download IES files to ensure exact photometric value.

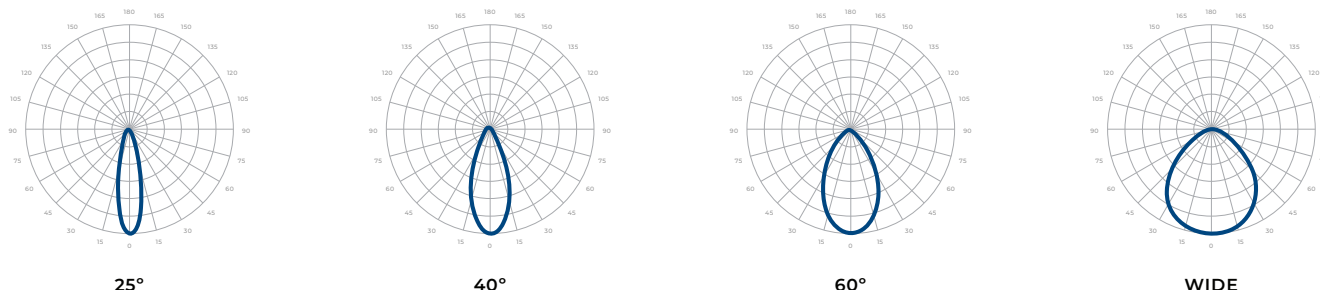


DMX REQUIREMENTS

The Whiz 2.0 Tunable White fixture with DMX unit has **two channels** per fixture (1 to control intensity, 1 to control color). When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

| DMX Address | | |
|-------------|---------------------------|-------------------------|
| Fixture | Intensity Control (ex. X) | Color Control (ex. X+1) |
| #1 | 1 | 2 |
| #2 | 3 | 4 |
| #3 | 5 | 6 |

The fixture can be connected with RJ45 or XLR sockets. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

| CONNECTION | RJ45 (CAT5e) | 5-PIN XLR |
|------------|-----------------------------------|-----------|
| Common | WHITE/BROWN(PIN7) & BROWN (PIN 8) | PIN 1 |
| Signal - | ORANGE (PIN 2) | PIN 2 |
| Signal + | WHITE/ORANGE (PIN 1) | PIN 3 |
| Spare | - | PIN 4 |
| Spare | - | PIN 5 |



RJ45 Sockets



DMX IN DMX OUT

XLR Sockets

COMPATIBLE DMX CABLING LIST



DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 or Belden 9841 for DMX installation. Belden 9729/9841 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed.




SPECIFICATION SHEET / TUNABLE WHITE
WHIZ 2.0 SLEEK AND ARCHITECTURAL
 HIGH CEILING SOLUTION

METEOR

DIMENSIONS

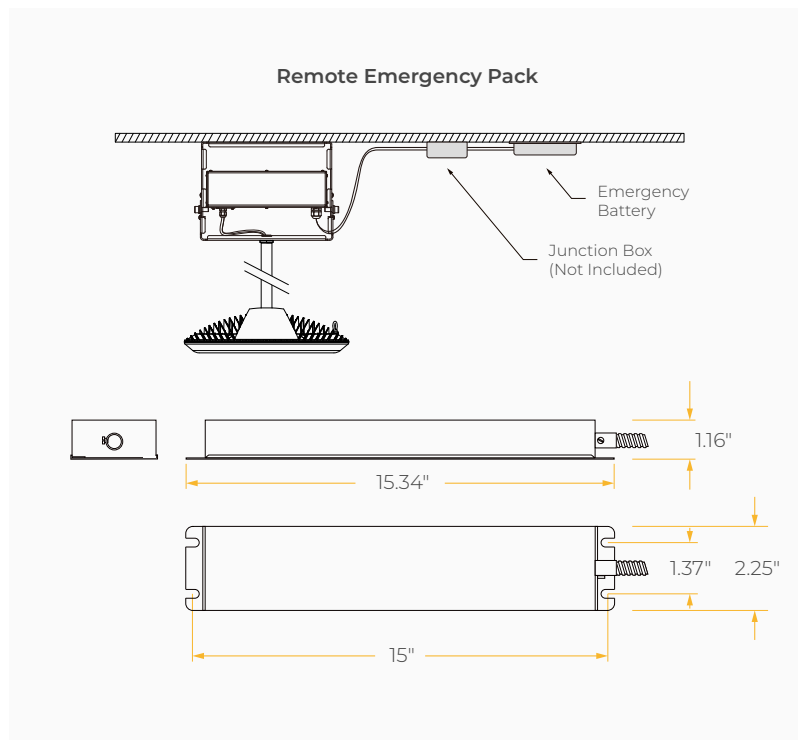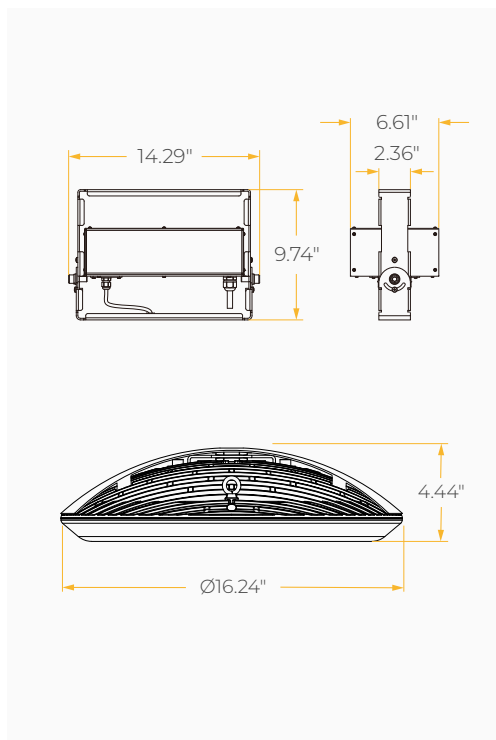


ACCESSORY

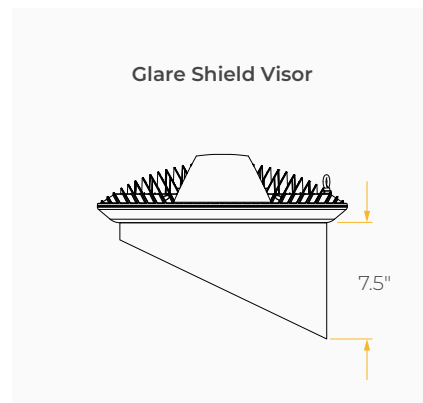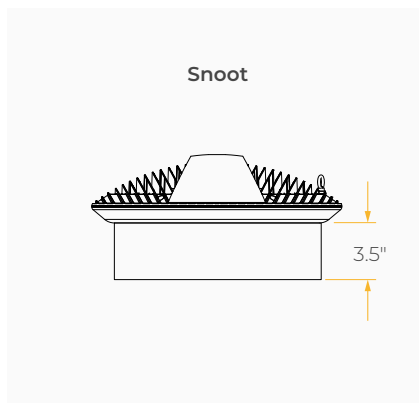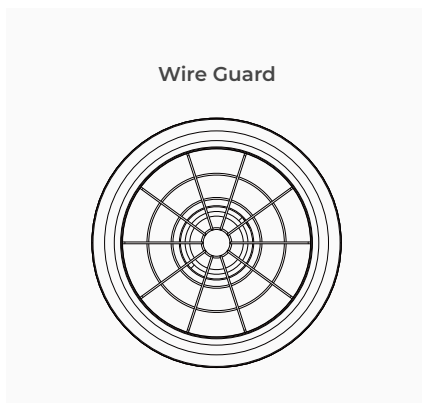


MOUNTING OPTIONS


Stem Mount

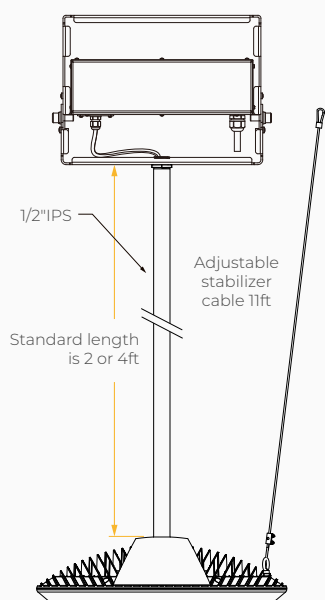


Adjustable
Aircraft Cable

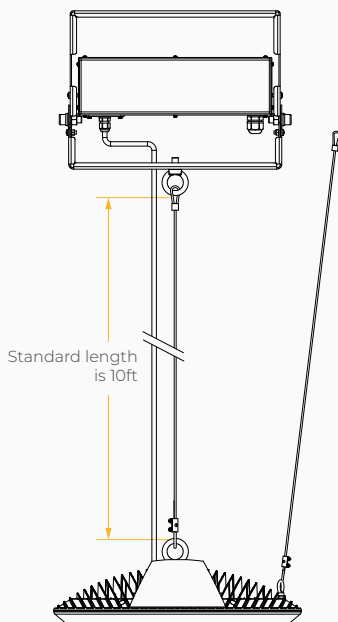


Uplight Mount

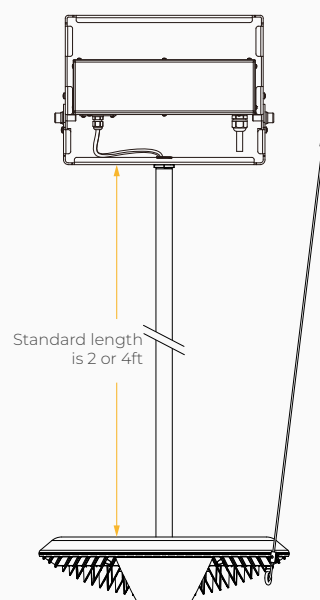

Adjustable Uplight
(45° Tilt on each side)

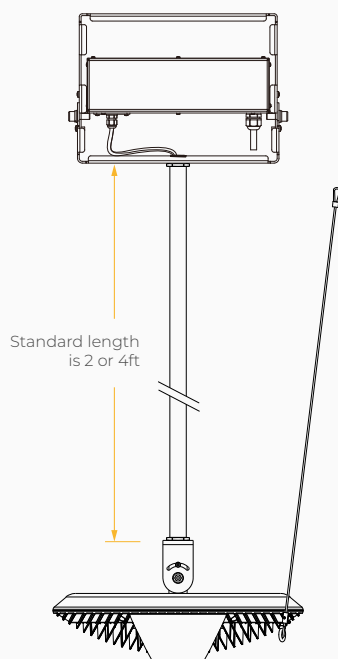

LED DISTRIBUTION

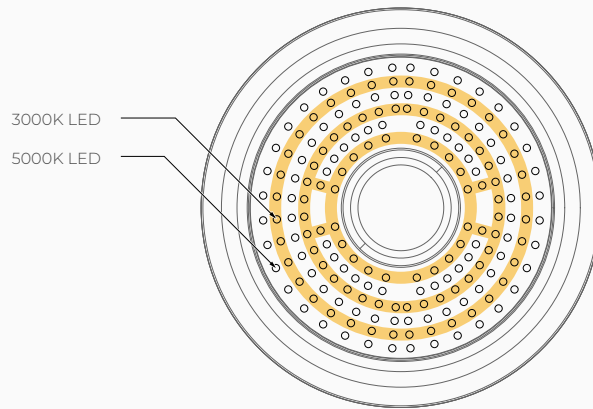

150W (75W : 3000K ; 75W : 5000K)

300W (150W : 3000K ; 150W : 5000K)