

ATRIA 4

QUIET CYLINDER WITH PRISMATIC LENS

SPECIFICATION SHEET
TUNABLE WHITE

Housing

Diameter : Ø4.8" | Height : 12.6" | Weight : 8 lbs

Material

Housing : High Pressure Die-Cast Aluminum

Lens : Clear Polycarbonate

Power Input

15W, 25W, 35W, 45W | 120-277V

Lumen Output

1,750 lm (15W), 2,460 lm (25W), 2,870 lm (35W), 3,370 lm (45W)

Dimming

Superior 0-10V : Dims to 1%

DMX : High resolution dims to 0.1%

Color Quality

CRI 85+

Rated Life

> 100,000 Hours (L70)

Finish



Black



White

Color Temperature



ColorFlip™ Tunable White
2700K ↔ 6500K

Optics



45°



60°



Wide

Mounting



Stem
Mount



Adjustable
Cable



Wall
Mount



Yoke
Mount



Surface
Mount

Warranty

5 Year limited warranty


Listing



Masterfully engineered and aesthetically refined.

The Atria 4 is a high-performing cylinder for mixed applications. The cylinder is compatible with our ColorFlip™ color-changing technologies, and feature decorative options in the glow ring and mid-lit reveal.

A prismatic lens offers superior light transmission and minimizes glare.

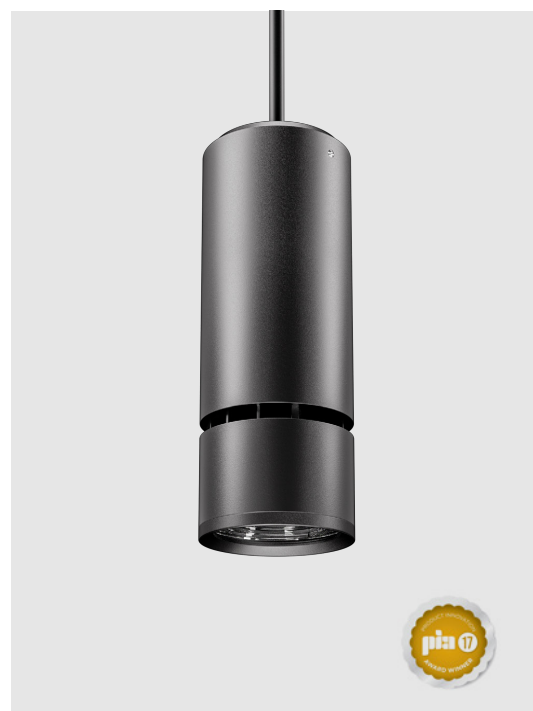

METEOR

meteor-lighting.com

ATRIA 4

QUIET CYLINDER
WITH PRISMATIC LENS

SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

AS4	MODEL	ATRIA 4		
	WATTAGE	15 15W 45 45W	25 25W	35 35W
TNW	CCT / CRI	TNW 2700K – 6500K		
UNV	VOLTAGE	UNV 120 – 277V		
	DIMMING	SPV Superior 0-10V dims to 1%	DMX ¹ DMX dims to 0.1% (XLR Sockets)	DMXR ¹ DMX dims to 0.1% (RJ45 Sockets)
	BEAM ANGLE	45 45°	60 60°	WD ² Wide
	FINISH	BLK Black	WHT White	
	RIM FINISH	STD Standard Trim	GLR Glow Ring	
	MOUNTING	SUM Surface Mount AD10 Adjustable Cable 10ft SAD10 Sloped Adjustable Cable 10ft	ST2 Stem 2ft WLM Wall Mount	ST4 Stem 4ft YKM Yoke Mount
	ACCESSORIES	DF ³ Diffuser FCS ⁵ Field Cut Stem Adapter Kit	EMP Remote Emergency Pack	CT ⁴ Conduit Mount

[↻ CLEAR FORM](#)

¹ DMX option not compatible with WLM

² Please factor in change in lumen output of -12% with WD

³ Please factor in change in lumen output with diffuser (-20% with WD; -12% with other degrees)

⁴ Option is not compatible with SUM, YKM, WLM

⁵ Option is not compatible with outdoor or natatorium configurations

TECHNICAL DETAILS

Electrical

- 1,750 lm (15W), 2,460 lm (25W)
- 2,870 lm (35W), 3,370 lm (45W)
- Power Input : Universal (120-277V)
- Operating Temperature : -13°F~104°F
- Surge Protection : Built-in is 2.5KV
- Emergency Pack with Mounting Plate : Bodine BSL20B2UEK55CIII
- Power Factor Greater than 0.9

LED Features

- ColorFlip™ Tunable White 2700K ↔ 6500K
- CRI 85+
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs
- Lumen Maintenance > 0.90 at 60,000 hours

Optics

- Precision molded high transmittance clear PC lens
- Beam Angle : 45°, 60°, Wide

Advanced Dimming

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting
- Superior 0-10V : Dims to 1%
- DMX : High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

Housing

- Diameter : Ø4.8"
- Height : 12.6"
- Material : High Pressure Die-Cast Aluminum, PC Lens
- Weight : 8 lbs

Mounting

- Stem 2ft or 4ft; 45° Swivel Canopy Included
- Adjustable Cable 10ft
- Surface Mount
- Wall Mount
- Yoke Mount
- Sloped Adjustable Cable 10ft

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- CE
- FCC
- UKCA
- Energy Star Rated

PERFORMANCE SUMMARY*

ColorFlip™	2700K	3000K	3500K	4000K	4500K	5000K	5700K	6500K
DMX CCT Signal (%)	0%	10%	25%	45%	60%	70%	85%	100%
0-10V CCT Voltage	0	1	2.5	4.5	6	7	8.5	10
15W	1,545lm	1,585lm	1,630lm	1,670lm	1,690lm	1,710lm	1,730lm	1,750lm
25W	2,175lm	2,185lm	2,200lm	2,210lm	2,270lm	2,335lm	2,400lm	2,460lm
35W	2,545lm	2,630lm	2,720lm	2,800lm	2,820lm	2,835lm	2,855lm	2,870lm
45W	2,985lm	3,085lm	3,190lm	3,290lm	3,310lm	3,330lm	3,350lm	3,370lm
CRI	85	86	87	88	89	88	87	86

*Lumen Multiplier 40° 60° baseline 0.82




PERFORMANCE SUMMARY*

Current Consumption		
WATTAGE / VOLT	120V	277V
15W	0.17A	0.08A
25W	0.23A	0.11A
35W	0.34A	0.15A
45W	0.45A	0.2A

Emergency Pack Lumen Output Table				
CCT	2700K	3000K	4000K	5000K
LUMEN	1,640lm	1,760lm	1,890lm	1,950lm

PHOTOMETRICS

Below is a typical photometric representation of the Atria 4 fixture. Please download IES files to ensure exact photometric value.

**DMX REQUIREMENTS**

The Atria 4 Tunable White fixture with DMX unit has **two channels** per fixture (1 to control intensity, 1 to control color). When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.


DMX Address		
Fixture	Intensity Control (ex. X)	Color Control (ex. X+1)
#1	1	2
#2	3	4
#3	5	6

The fixture can be connected with RJ45 or XLR sockets. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

DMX REQUIREMENTS

CONNECTION	RJ45 (CAT5e)	5-PIN XLR
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)	PIN 1
Signal -	ORANGE (PIN 2)	PIN 2
Signal +	WHITE/ORANGE (PIN 1)	PIN 3
Spare	-	PIN 4
Spare	-	PIN 5

DMX IN DMX OUT



RJ45 Sockets



DMX IN DMX OUT

XLR Sockets

COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 for DMX installation. Belden 9729 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed.

DIMENSIONS




Standard Trim



Glow Ring

DIMENSIONS




ATRIA 4


QUIET CYLINDER
WITH PRISMATIC LENS

DIMENSIONS

Remote Emergency Pack

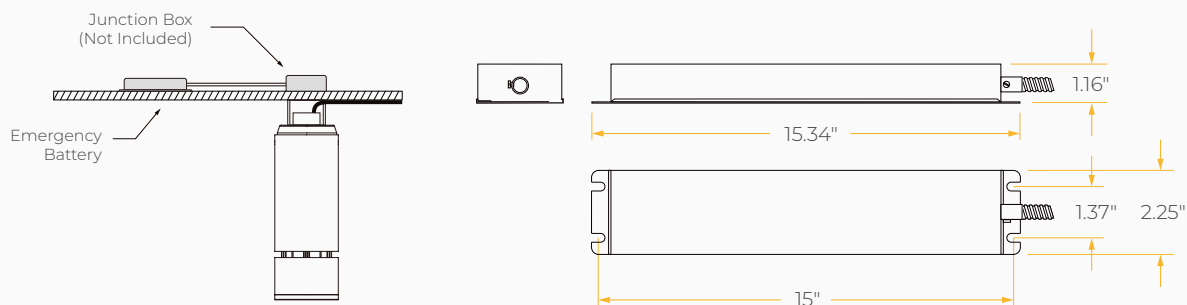


Conduit Mount

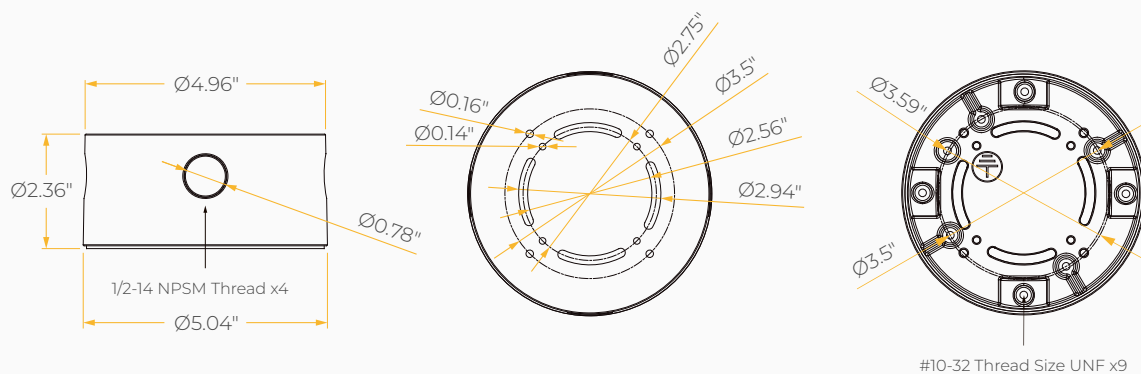


MOUNTING OPTIONS*

*Junction box not included


Stem Mount

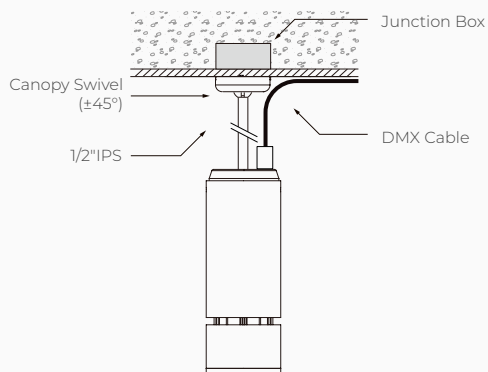


Adjustable Cable

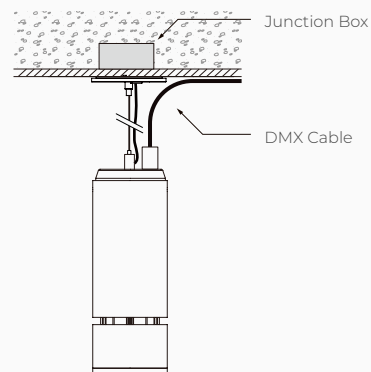

Wall Mount



Surface Mount

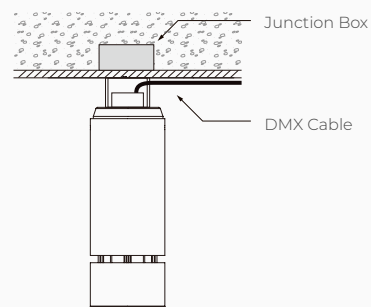

Yoke Mount

