

ATRIA 6

POWERFUL COLOR CHANGING CYLINDER

SPECIFICATION SHEET
WARM DIM

Housing

Diameter : Ø6.4" | Height : 17" | Weight : 19.8 lbs

Material

Housing : High Pressure Die-Cast Aluminum

Optics : Aluminum Reflector

Power Input

40W, 60W, 80W, 100W | 120-277V

Lumen Output

3,000 lm (40W), 4,350 lm (60W), 6,200 lm (80W), 7,750 lm (100W)

Dimming

Superior 0-10V : Dim to 1 %

DMX : High resolution dims to 0.1%

Color Quality

CRI 85+

Rated Life

> 100,000 Hours (L70)

Finish



Black



White

Color Temperature



ColorFlip™ Warm Dim
1900K ↔ 3000K

Optics



40°



60°



Wide

Mounting



Surface Mount



Stem Mount



Adjustable Cable



Yoke Mount



Wall Mount

Warranty


5 Year limited warranty

Listing



Masterfully engineered and aesthetically refined.

The Atria 6 is a high-performing cylinder for mixed applications. The cylinder is compatible with our ColorFlip™ color-changing technologies, as well as being wet location rated. Specified in convention centers, performance venues, and high ceiling spaces that need a quiet design but a lot of light.

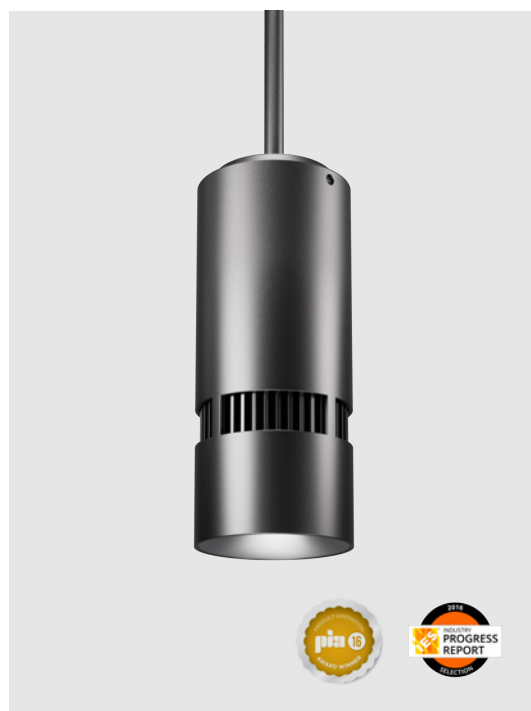

METEOR

meteor-lighting.com

SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

AS6	MODEL	ATRIA 6		
<input type="text"/>	WATTAGE	40 40W 100 100W	60 60W	80 80W
WDIM	CCT / CRI	WDIM 1900K-3000K		
UNV	VOLTAGE	UNV 120 – 277V		
<input type="text"/>	DIMMING	SPV Superior 0-10V dims to 1%	DMX¹ DMX dims to 0.1% (XLR Sockets)	DMXR¹ DMX dims to 0.1% (RJ45 Sockets)
<input type="text"/>	BEAM ANGLE	40 40°	60 60°	WD² Wide
<input type="text"/>	FINISH	BLK Black	WHT White	
<input type="text"/>	RIM FINISH	STD Without Ring	GLR Glowing Ring	
<input type="text"/>	MOUNTING	SUM Surface Mount AD10 Adjustable Cable 10ft WLM³ Wall Mount	ST2 Stem 2ft SAD10 Sloped Adjustable Cable 10ft	ST4 Stem 4ft YKM Yoke Mount
<input type="text"/>	ACCESSORIES	SPD⁴ Surge Protector CB⁶ Cross Baffle	EMP Remote Emergency Pack CT⁷ Conduit Mount	DF⁵ Diffuser FCS Field Cut Stem Adapter Kit

¹ Wall Mount DMX does not include XLR / RJ45 sockets

² Please factor in change in lumen output with WD -20%

³ Wall Mount DMX wiring is through 3 DMX wires (Positive / Negative / Common)

⁴ Surge protector for up to 10KV. Applicable for unstable mains or facilities using high power machineries

⁵ Please factor in change in lumen output with DF (-20% with WD; -12% with other degrees)

⁶ Please factor in change in lumen output with CB -30%

⁷ Option is not compatible with SUM, YKM, WLM

TECHNICAL DETAILS**Electrical**

- 3,000 lm (40W), 4,350 lm (60W)
- 6,200 lm (80W), 7,750 lm (100W)
- Power Input : Universal (120-277V)
- Operating Temperature : -40°F~112°F
- Surge Protection : Built-in is 4KV
- Emergency Pack with Mounting Plate : Bodine BSL20B2UEK55CIII
- Power Factor Greater than 0.9

LED Features

- ColorFlip™ Warm Dim 1900K ↔ 3000K
- CRI 85+
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs
- Lumen Maintenance > 0.90 at 60,000 hours

Optics

- Aluminum Reflector
- Beam Angle : 40°, 60°, WD

Advanced Dimming

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting
- Superior 0-10V : Dim to 1%
- DMX : High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

Housing

- Diameter : Ø6.4"
- Height : 17"
- Material : High Pressure Die-Cast Aluminum
- Weight : 19.8 lbs

Mounting

- Surface Mount
- Stem 2ft or 4ft; 45° Swivel Canopy Included
- Adjustable Cable 10ft
- Sloped Adjustable Cable 10ft
- Yoke Mount
- Wall Mount

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- CE
- FCC
- UKCA

PERFORMANCE SUMMARY*

Warm Dim	1900K						3000K
DMX CCT Signal (%)	7%	20%	40%	60%	80%	100%	
0-10V CCT Voltage	0.7	2	4	6	8	10	
40W	60lm	270lm	810lm	1,530lm	2,310lm	3,000lm	
60W	90lm	390lm	1,175lm	2,220lm	3,350lm	4,350lm	
80W	125lm	560lm	1,675lm	3,160lm	4,775lm	6,200lm	
100W	155lm	700lm	2,095lm	3,955lm	5,970lm	7,750lm	


*Tolerance±8%

Current Consumption		
WATTAGE / VOLT	120V	277V
40W	0.37A	0.16A
60W	0.55A	0.24A
80W	0.73A	0.32A
100W	0.92A	0.4A


Emergency Pack Lumen Output Table	
CCT	6500K
LUMEN	2,000lm

PHOTOMETRICS


Below is a typical photometric representation of the Atria 6 fixture. Please download IES files to ensure exact photometric value.



40°



60°




Wide

DMX REQUIREMENTS

The Atria 6 fixture with DMX is a **single channel dmx** unit that dims both intensity and color temperature between 1900K <-> 3000K. When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

The fixture can be connected with RJ45 or XLR sockets. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

CONNECTION	RJ45 (CAT5e)	5-PIN XLR
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)	PIN 1
Signal -	ORANGE (PIN 2)	PIN 2
Signal +	WHITE/ORANGE (PIN 1)	PIN 3
Spare	-	PIN 4
Spare	-	PIN 5



RJ45 Sockets




XLR Sockets

COMPATIBLE DMX CABLING LIST


DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 for DMX installation. Belden 9729 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed.

RIM FINISH


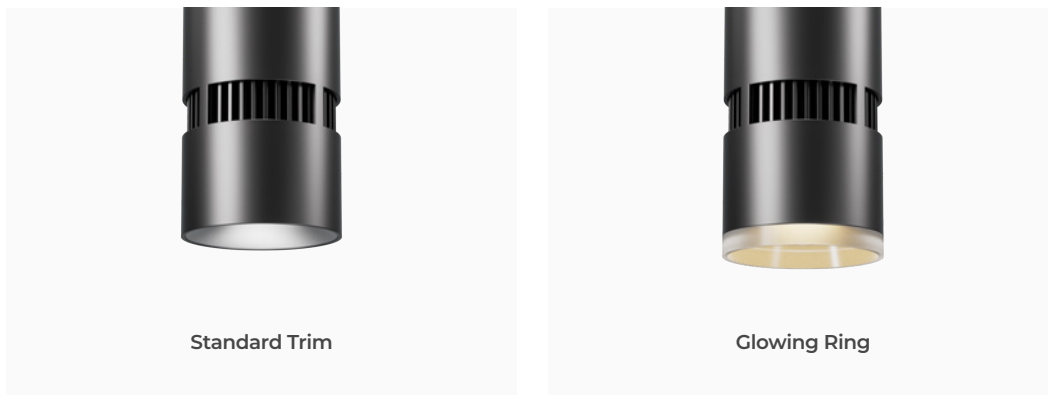


DIMENSIONS

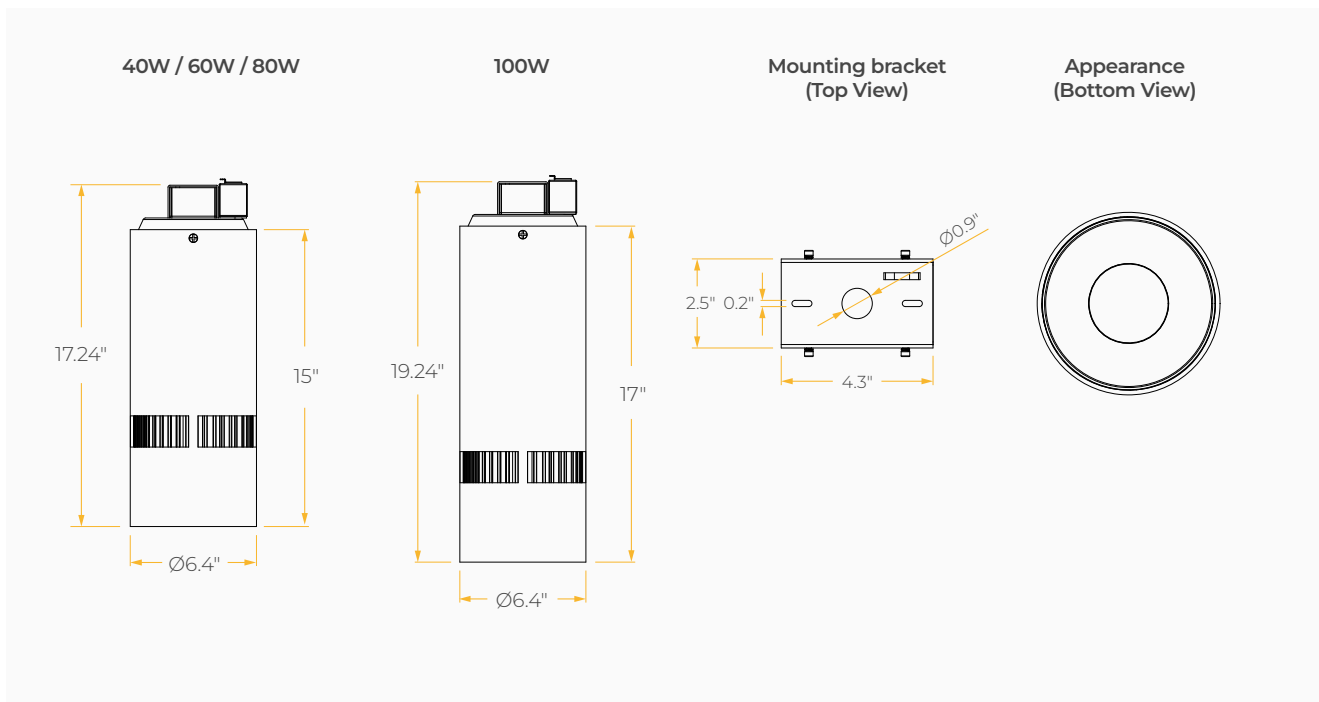


DIMENSIONS

Remote Emergency Pack

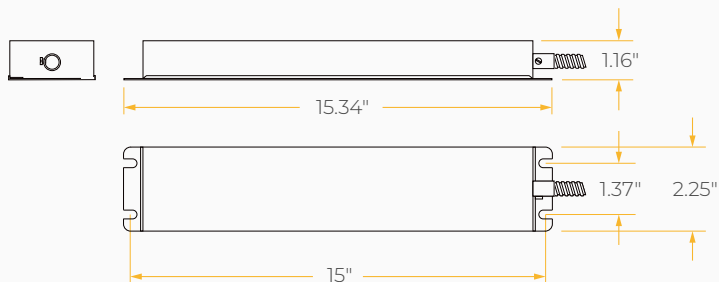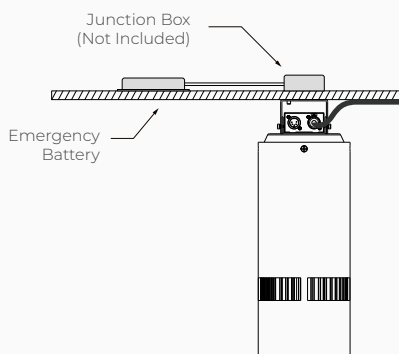


Conduit Mount

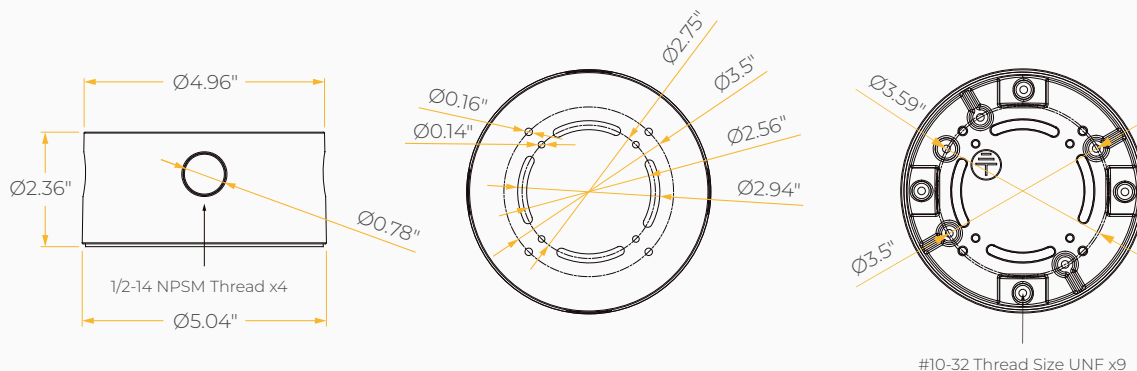


MOUNTING OPTIONS*

*Junction Box not included


Surface Mount

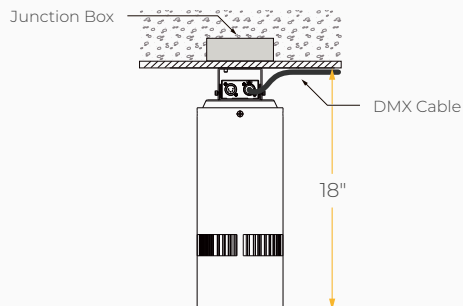


Stem Mount

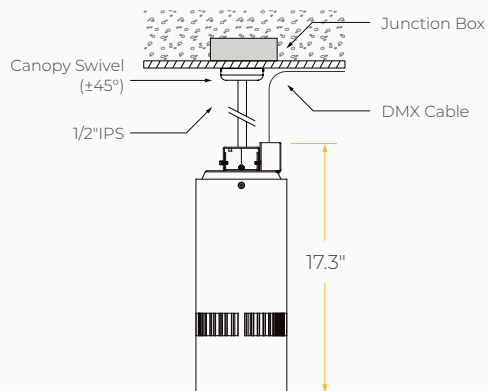

Adjustable Cable

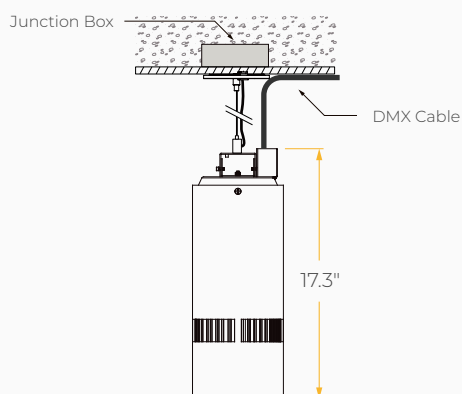

Yoke Mount

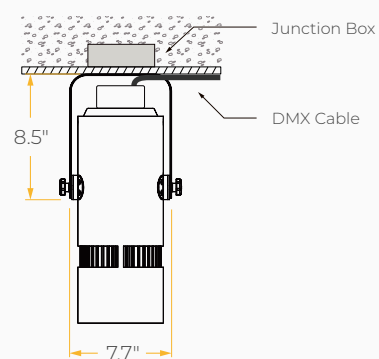

Wall Mount

