

# ATRIA II 10

REIMAGINING PERFORMANCE SPACES

SPECIFICATION SHEET  
WARM DIM

## Housing

Diameter : Ø9.4" | Height : 20.5" | Weight : 30 lbs

## Material

Housing : High Pressure Die-Cast Aluminum

Optics : Metal Reflector

## Power Input

80W, 110W, 140W, 180W, 220W | 120-277V

## Lumen Output

6,200 lm (80W), 8,500 lm (110W), 10,700 lm (140W),  
13,500 lm (180W), 16,100 lm (220W)

## Dimming

Superior 0-10V : dim to 1 %

DMX : High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)


## Color Quality

CRI 85+

## Rated Life

> 100,000 Hours (L70)

## Finish




## Color Temperature



ColorFlip™ Warm Dim  
1900K ↔ 3000K

## Optics



## Mounting



## Warranty

5 Year limited warranty


## Listing



## Versatile and Compact Architectural Cylinder

Engineered for performance spaces, this architectural compact cylinder seamlessly integrates into ceilings, delivering powerful performance with vibrant, color-changing technology that elevates any stage environment.

ColorFlip™ harnesses advanced flip-chip technology, designed in-house, to deliver high-efficacy, flexible, and cost-effective color tuning solutions. This technology ensures robust output and precise color accuracy.

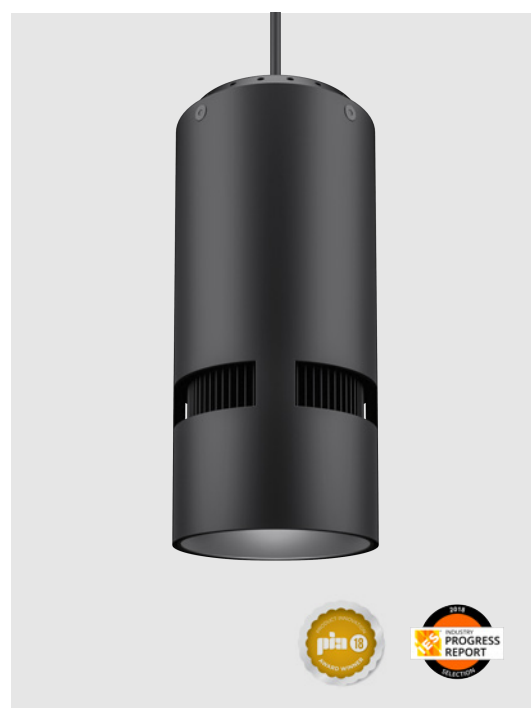

METEOR

meteor-lighting.com

## SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

<b>ASII10</b>	<b>MODEL</b>	<b>ATRIA II 10</b>		
	<b>WATTAGE</b>	<b>80</b> 80W <b>180</b> 180W	<b>110</b> 110W <b>220</b> 220W	<b>140</b> 140W
<b>WDIM</b>	<b>CCT / CRI</b>	<b>WDIM</b> 1900K-3000K		
<b>UNV</b>	<b>VOLTAGE</b>	<b>UNV</b> 120 – 277V		
	<b>DIMMING</b>	<b>SPV</b> Superior 0-10V dims to 1%	<b>DMX</b> DMX dims to 0.1% (XLR Sockets)	<b>DMXR</b> DMX dims to 0.1% (RJ45 Sockets)
	<b>BEAM ANGLE</b>	<b>45</b> 45°	<b>55</b> 55°	<b>WD<sup>1</sup></b> Wide
	<b>FINISH</b>	<b>BLK</b> SilentBlack™, Matte Finish	<b>WHT</b> SilentWhite™, Matte Finish	
	<b>MOUNTING</b>	<b>ST2</b> Stem 2ft <b>SAD10</b> Sloped Adjustable Cable 10ft	<b>ST4</b> Stem 4ft <b>WLM<sup>2</sup></b> Wall Mount	<b>AD10</b> Adjustable Cable 10ft <b>YKM</b> Yoke Mount
	<b>ACCESSORIES</b>	<b>SPD<sup>3</sup></b> Surge Protector <b>FCS</b> Field Cut Stem Adapter Kit	<b>HC<sup>4</sup></b> Hex Cell Louver	<b>CT<sup>5</sup></b> Conduit Mount

 **CLEAR FORM**

<sup>1</sup> Please factor in change in lumen output with WD -20%

<sup>2</sup> Specifying wall mount with DMX does not feature XLR or RJ45 sockets; connections are hard-wired using three DMX wires

<sup>3</sup> Surge protector for up to 10KV. Applicable for unstable mains or facilities using high power machineries

<sup>4</sup> Please factor in change in lumen output of -30%

<sup>5</sup> Option is not compatible with YKM, WLM

## TECHNICAL DETAILS

---

### Electrical

- 6,200 lm (80W)
- 8,500 lm (110W)
- 10,700 lm (140W)
- 13,500 lm (180W)
- 16,100 lm (220W)
- Power Input : Universal (120-277V)
- Operating Temperature : -13°F~112°F
- Surge Protection : Built-in is 4KV
- Power Factor Greater than 0.9

### LED Features

- ColorFlip™ Warm Dim 1900K ↔ 3000K
- CRI 85+
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs
- Lumen Maintenance > 0.90 at 60,000 hours

### Optics

- Precision molded high transmittance clear PC lens
- Beam Angle : 45°, 55°, WD

### Advanced Dimming

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting
- Superior 0-10V : Dims to 1 %
- DMX : High resolution dims to 0.1%  
(Supports ANSI E1.20 RDM protocol)

### Housing

- Diameter : Ø9.4"
- Height : 20.5"
- Material : High Pressure Die-Cast Aluminum, Metal Reflector
- Weight : 30 lbs

### Mounting

- Stem 2ft or 4ft; 45° Swivel Canopy Included
- Adjustable Cable 10ft
- Sloped Adjustable Cable 10ft
- Wall Mount
- Yoke Mount

### Warranty


- 5-year limited warranty

### Listing

- ETL Damp Location Listed
- CE
- UKCA
- FCC

\*Tolerance $\pm$ 8%

Below is a typical photometric representation of the Atria II 10 fixture. Please download IES files to ensure exact photometric value.




## DMX REQUIREMENTS

The Atria II 10 fixture with DMX is a **single channel dmx** unit that dims both intensity and color temperature between 1900K <-> 3000K. When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

The fixture can be connected with RJ45 or XLR sockets. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

CONNECTION	RJ45 (CAT5e)	5-PIN XLR
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)	PIN 1
Signal -	ORANGE (PIN 2)	PIN 2
Signal +	WHITE/ORANGE (PIN 1)	PIN 3
Spare	-	PIN 4
Spare	-	PIN 5



RJ45 Sockets



DMX IN DMX OUT



XLR Sockets

## COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 or Belden 9841 for DMX installation. Belden 9729/9841 is a shielded twisted pair cable, which allows for a spare pair for 'out and back' type terminations if needed.


## DIMENSIONS

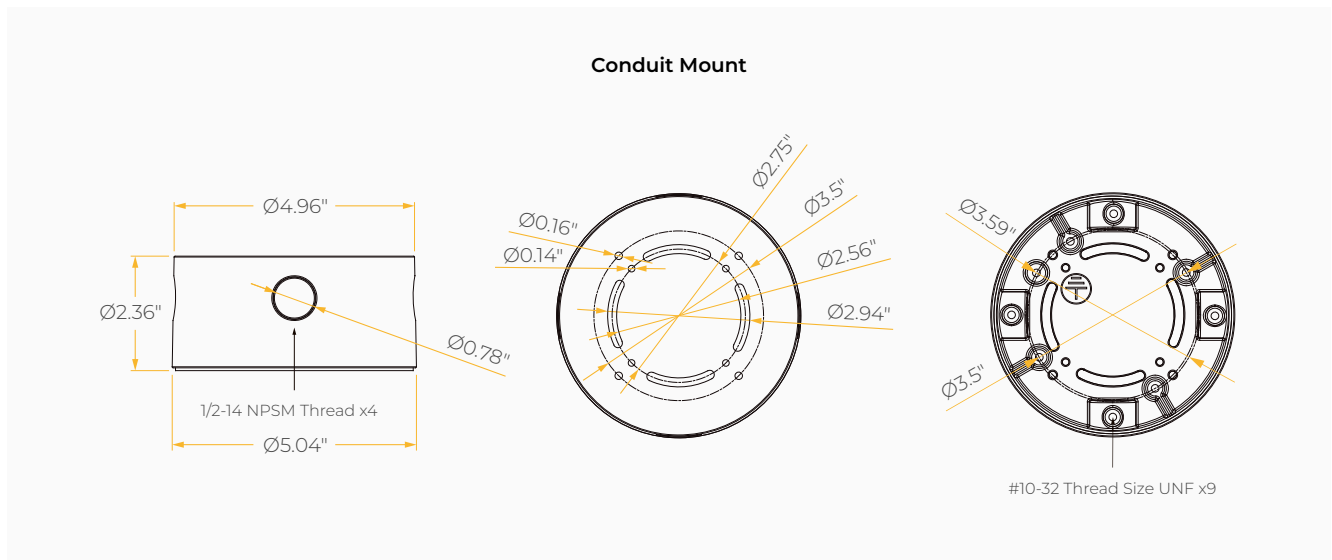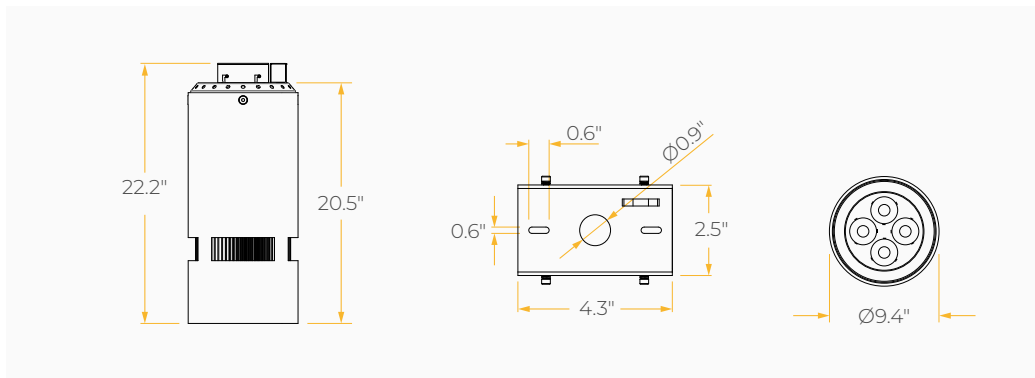


## MOUNTING OPTIONS\*

\*Junction box not included


**Stem Mount**

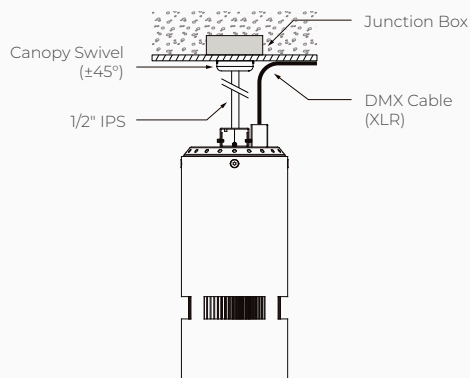

**Sloped Adjustable Cable /  
Adjustable Cable**

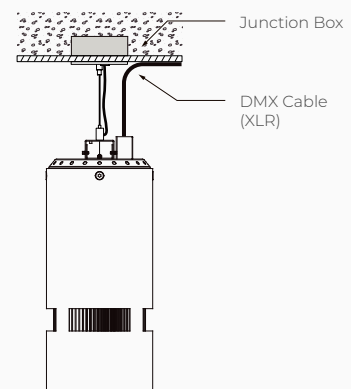

**Wall Mount**



**Yoke Mount**

