

ATRIA II 6

REIMAGINING PERFORMANCE SPACES

SPECIFICATION SHEET
STANDARD

Housing

Diameter : Ø6.4" | Height : 15" | Weight : 19.8 lbs

Material

Housing: High Pressure Die-Cast Aluminum

Optics: Aluminum Reflector

Power Input

40W, 60W, 80W, 100W | 120-277V

Lumen Output

5,160 lm (40W), 8,590 lm (60W), 10,920 lm (80W), 11,950 lm (100W)

Dimming

Standard 0-10V: Dims to 10%

Superior 0-10V: Dim to 1%

DMX: High resolution dims to 0.1%

TRC: Linear line-voltage phase control, dims to 1%

LDE1: Hi-Lume 1% EcoSystem

DALI: Dims to 10%

Color Quality

CRI 85, CRI 93

Rated Life

> 100,000 Hours (L70)


Finish



Color Temperature



Optics



Mounting



Warranty

5 Year limited warranty

Listing



DesignLights Consortium™ Qualified Luminaires:

DLC QPL Product ID: S-M8KM3S


Not all product variations listed are DLC qualified.

To ensure that a specific model is qualified, visit www.designlights.org/search

Versatile and Compact Architectural Cylinder

Engineered for performance spaces, this cylinder offers versatile mounting and advanced dimming options. It seamlessly blends into ceilings, delivering powerful performance with vibrant, color-changing technology that elevates any stage environment.

With its next-gen design, the Atria Mark II features an upgraded light engine that boasts a 30% increase in lighting output across the series and introduces a new SilentBlack™ finish that reduces reflectance to under 5%.

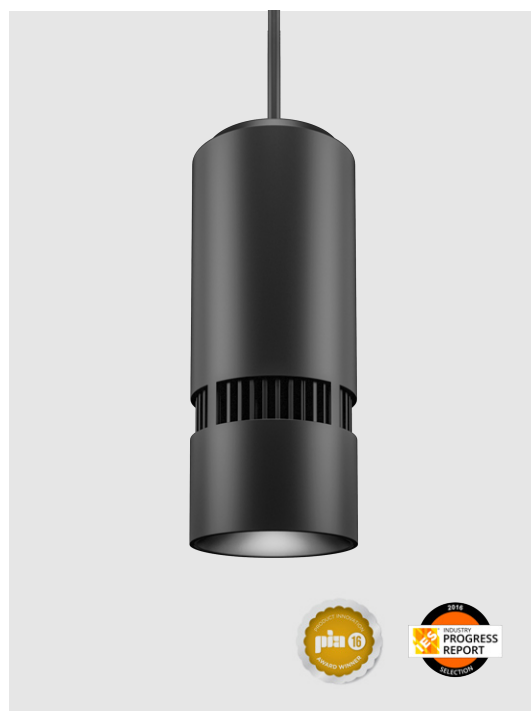

METEOR

meteor-lighting.com

SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

ASII6	MODEL	ATRIA II 6		
	WATTAGE	40 40W 100 100W	60 60W	80 80W
	CCT / CRI	278 2700K / CRI 85 309 3000K / CRI 93 408 4000K / CRI 85	279 2700K / CRI 93 358 3500K / CRI 85	308 3000K / CRI 85 359 3500K / CRI 93
UNV	VOLTAGE	UNV 120 – 277V		
	DIMMING	STV Standard 0-10V dims to 10% DMXR DMX dims to 0.1% (RJ45 Sockets) DALI DALI dims to 10%	SPV Superior 0-10V dims to 1% TRC ^{1,2} Linear line-voltage phase control, dims to 1%	DMX DMX dims to 0.1% (XLR Sockets) LDEI ³ Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black
	BEAM ANGLE	40 40°	60 60°	WD ⁴ Wide
	FINISH	BLK SilentBlack™, Matte Finish	WHT SilentWhite™, Matte Finish	
	RIM FINISH	STD Standard Trim	GLR Glowing Ring	
	MOUNTING	SUM Surface Mount AD10 Adjustable Cable 10ft WLM ⁵ Wall Mount	ST2 Stem 2ft SAD10 Sloped Adjustable Cable 10ft	ST4 Stem 4ft YKM Yoke Mount
	ACCESSORIES	SPD ⁶ Surge Protector CB ⁸ Cross Baffle AWN ^{10,12} Lutron Athena Wireless Node Standalone Module NXC ^{11,12} NX Radio Module Canopy	EMP Remote Emergency Pack CT ⁹ Conduit Mount AWNC ^{10,12} Lutron Athena Wireless Node Canopy	DF ⁷ Diffuser FCS Field Cut Stem Adapter Kit NX ^{11,12} NX Radio Module Standalone Module

 CLEAR FORM

¹ Option is only compatible with 120V and not compatible with 100W

² Please factor in change in lumen output of -20% with TRC

³ Option is not compatible with 100W

⁴ Please factor in change in lumen output of -20% with WD

⁵ Specifying wall mount with DMX does not feature XLR or RJ45 sockets; connections are hard-wired using three DMX wires.

⁶ Surge protector for up to 10KV. Applicable for unstable mains or facilities using high power machineries

⁷ Please factor in change in lumen output with DF (-20% with WD; -12% with other degrees)

⁸ Please factor in change in lumen output with CB -30%, and CB is not compatible with TRC, LDEI

⁹ CT only compatible with ST and AD mounting types

¹⁰ Option is only compatible with STV, SPV, DALI

¹¹ Option is only compatible with STV, SPV

¹² Option is not compatible with SUM, WLM, YKM

TECHNICAL DETAILS

Electrical

- 5,160 lm (40W)
- 8,590 lm (60W)
- 10,920 lm (80W)
- 11,990 lm (100W)
- Power Input: Universal (120-277V)
- Operating Temperature: -13°F~112°F
- Surge Protection: Built-in is 4KV
- Emergency Pack with Mounting Plate: Bodine BSL20B2UEK55CIII

LED Features

- Color Temperature: 2700K, 3000K, 3500K, 4000K
- CRI 85, CRI93
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs
- Lumen Maintenance > 0.90 at 60,000 hours

Optics

- Aluminum Reflector
- Beam Angle: 40°, 60°, WD

Advanced Dimming

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting
- Standard 0-10V: Dims to 10%
- Superior 0-10V: Dim to 1%
- DMX: High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)
- TRC: Linear line-voltage phase control, dims to 1% (120V only)
- LDEI: Hi-Lume 1% EcoSystem LED Driver with Soft-on, Fade-to-Black
- DALI: Dims to 10%

Housing

- Diameter: Ø6.4"
- Height: 15"
- Material: High Pressure Die-Cast Aluminum
- Weight: 19.8 lbs

Mounting

- Stem 2ft or 4ft; 45° Swivel Canopy Included
- Adjustable Cable 10ft
- Sloped Adjustable Cable 10ft
- Surface Mount
- Yoke Mount
- Wall Mount

Warranty

- 5-year limited warranty

Listing

- DLC Listed
- ETL Damp Location Listed
- CE
- FCC
- UKCA

PERFORMANCE SUMMARY*

Delivered Lumens				
CCT/WATTAGE	2700K	3000K	3500K	4000K
40W	4,825lm	5,070lm	5,155lm	5,160lm
60W	7,650lm	8,040lm	8,130lm	8,590lm
80W	9,340lm	9,995lm	10,445lm	10,920lm
100W	10,650lm	11,555lm	11,960lm	11,990lm

Current Consumption		
WATTAGE / VOLT	120V	277V
40W	0.37A	0.16A
60W	0.55A	0.24A
80W	0.73A	0.32A
100W	0.92A	0.4A

*Beam Angle: 60° *Tolerance ±8%


*For specifications requiring a CRI of 93, apply a 0.75 multiplier to the lumen output values listed.

PERFORMANCE SUMMARY*


Emergency Pack Lumen Output Table			
CCT	2700K	3000K	4000K
LUMEN	1,640lm	1,760lm	1,890lm

PHOTOMETRICS


Below is a typical photometric representation of the Atria II 6 fixture. Please download IES files to ensure exact photometric value.



40°



60°




WIDE

DMX REQUIREMENTS

The Atria II 6 fixture with DMX is a **single channel dmx** unit. When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

The fixture can be connected with RJ45 or XLR sockets. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

CONNECTION	RJ45 (CAT5e)	5-PIN XLR
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)	PIN 1
Signal -	ORANGE (PIN 2)	PIN 2
Signal +	WHITE/ORANGE (PIN 1)	PIN 3
Spare	-	PIN 4
Spare	-	PIN 5



RJ45 Sockets



DMX IN DMX OUT
XLR Sockets

COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 for DMX installation. Belden 9729 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed.

COMPATIBLE LDE1 DIMMER LIST

LUTRON PART NO.						
RMJ-ECO32-DV-B	FCJ/FCJS-ECO	QSN-1ECO-S	QSN-2ECO-S	QSGRJ-_E	QSGR-_E	QP2-_ _ 2C
QP2-_ _ 4C	QP2-_ _ 6C	QP2-_ _ 8C	LQSE-2ECO-D			

COMPATIBLE TRC DIMMER LIST

PART NO.					
Lutron S-603PG	Lutron DVCL-153P	Lutron DVLV-600P	Lutron TGCL-153P	Lutron S-600P	Lutron DVELV-303P
Lutron SELV-300P	Lutron TG-600P	Lutron DVLV-600P	Lutron LG-600P	Lutron CT-103P	Lutron MAELV-600
Lutron FAELV-500	Leviton IPI06-1LZ	Leviton 6631-2	Leviton VPE06	Leviton 6683-IW	Leviton 6161
Leviton 6633-P	Leviton IPE04	Cooper DLC03P	Cooper SLC03P	Cooper DAL06P	Lightolier ZP260QEW

RIM FINISH






Standard Trim




Glowing Ring

DIMENSIONS

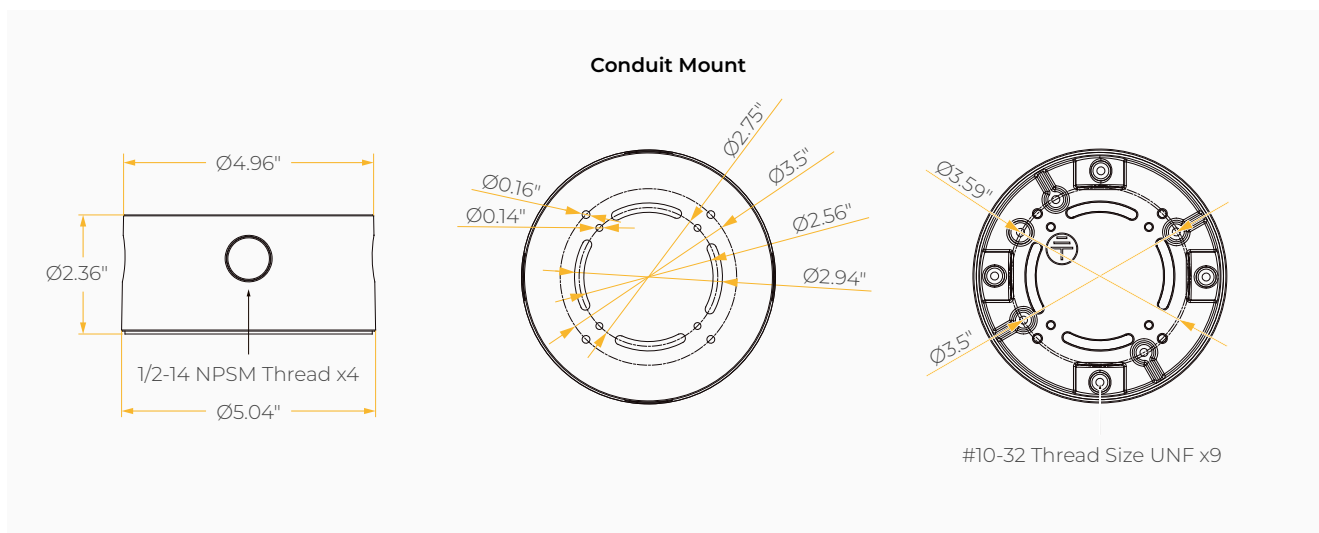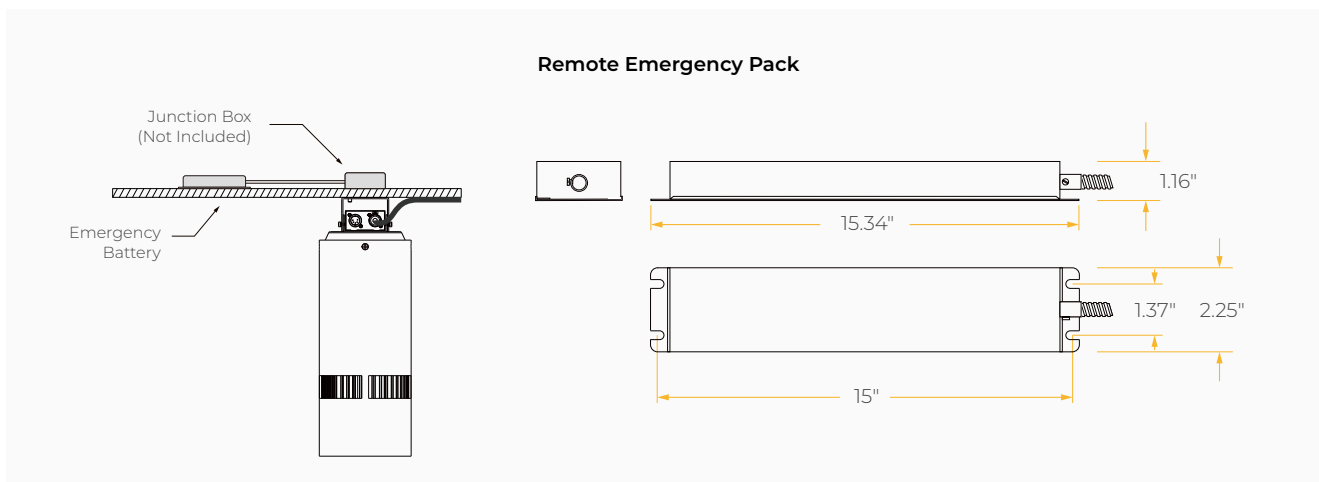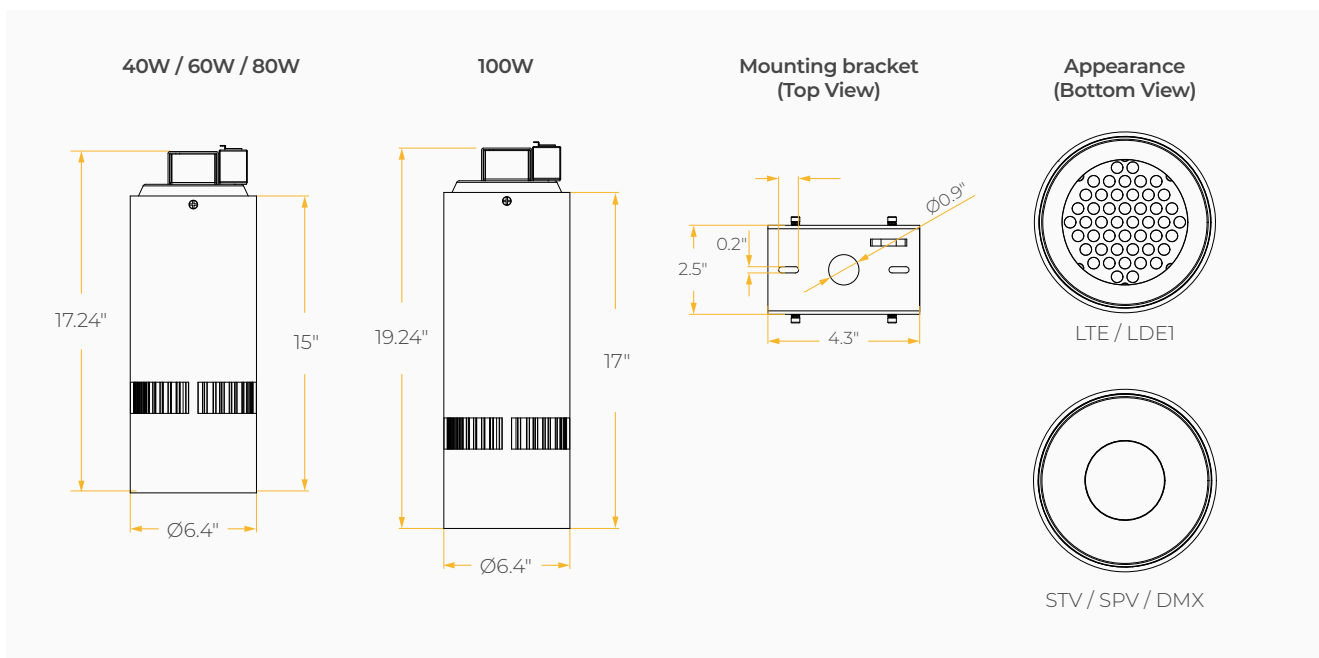


DIMENSIONS


Lutron Athena Wireless Node / NX Radio Standalone Module

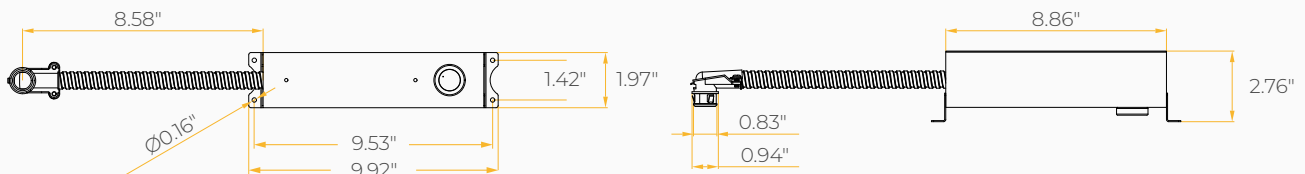

Lutron Athena Wireless Node Canopy

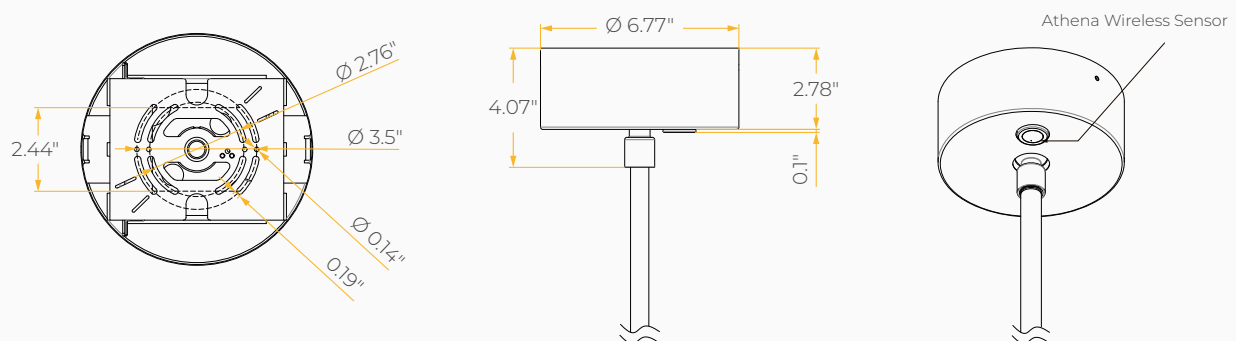


NX Radio Node Canopy

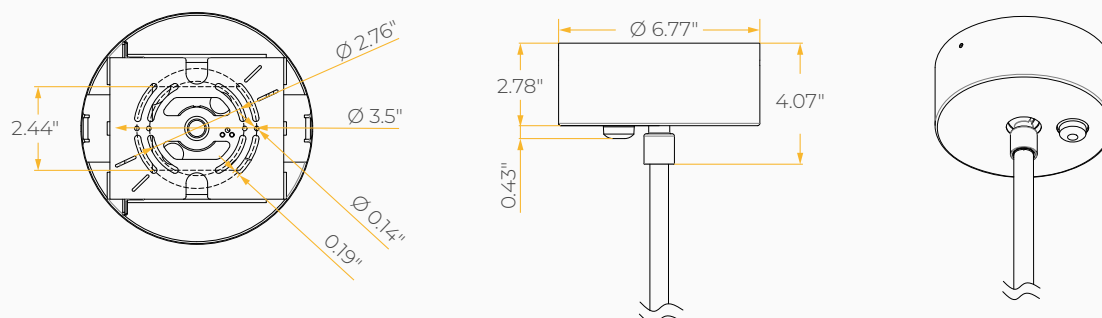


MOUNTING OPTIONS*

*Junction Box not included


Surface Mount

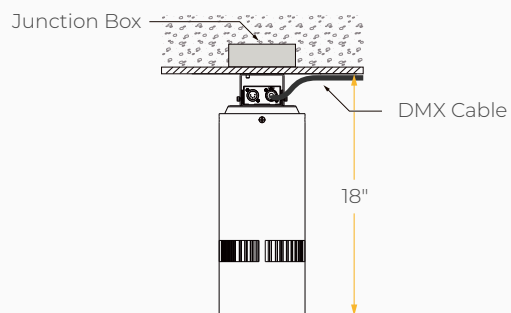


Stem Mount

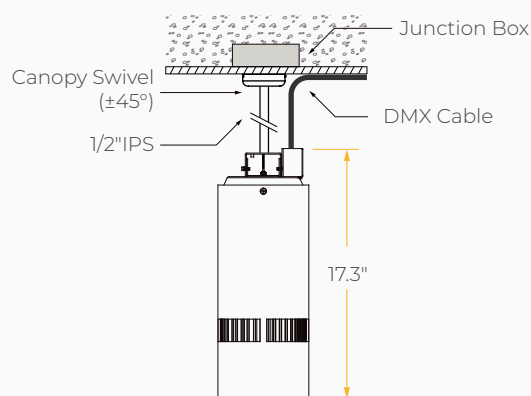

Adjustable Cable

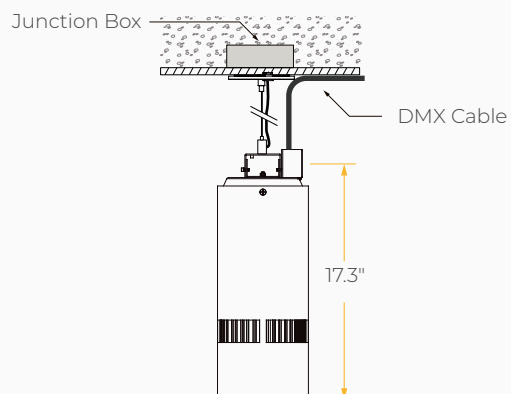

Yoke Mount

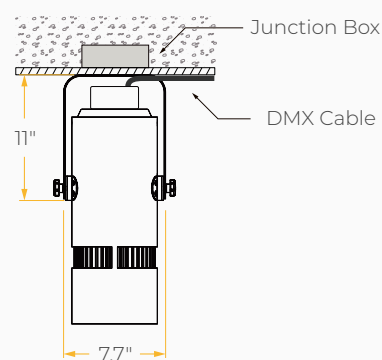

Wall Mount

