

## **IMPORTANT SAFETY INFORMATION** READ AND FOLLOW ALL SAFETY INSTRUCTIONS


---

**FOR FIELD ASSISTANCE PLEASE CALL  
+1-213-255-2060 #4**


---

- Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker.
- All servicing or relamping must be performed by qualified service personnel.
- Product must be grounded to avoid potential electric shock or other potential hazard.
- Product must be installed at locations and heights, in a manner consistent with its intended use, and in compliance with electrical code and local codes.

**SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE**

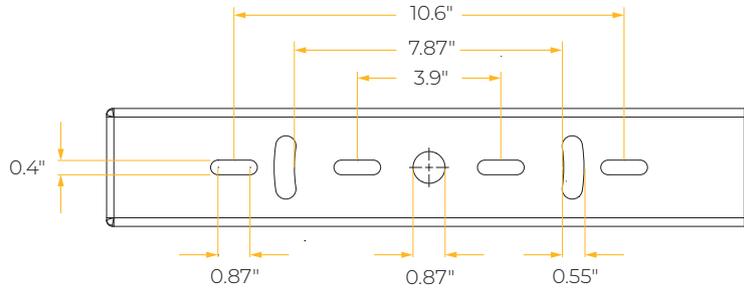


**DIMENSION**

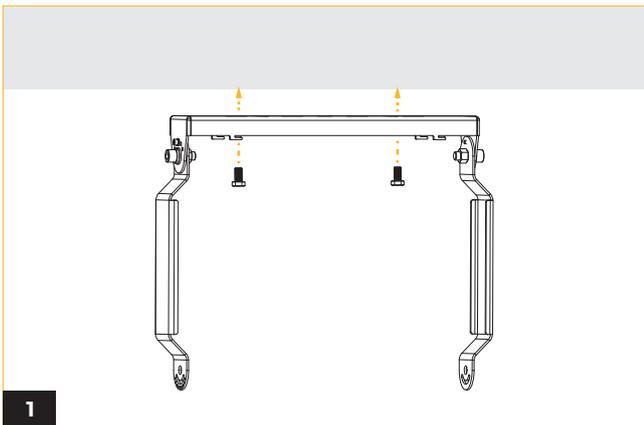


**1**

Secure bracket to a level surface with mounting hardware that is sufficient to support weight of the fixture and power box.

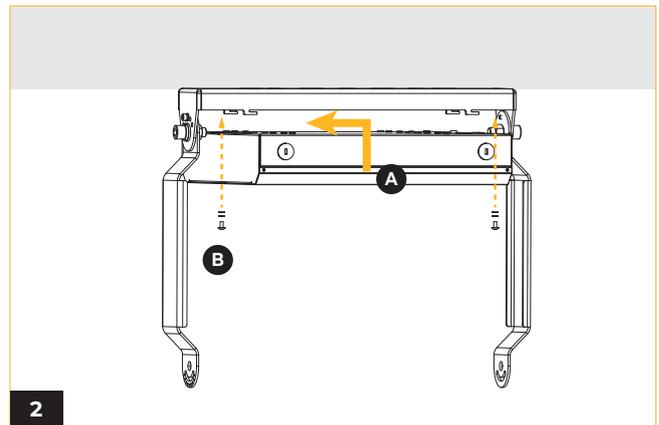


**2**

- (A)** Slip the power box hook with fastener over the lock-in grooves allocated.
- (B)** Fasten screws on either side to keep the power box in place.

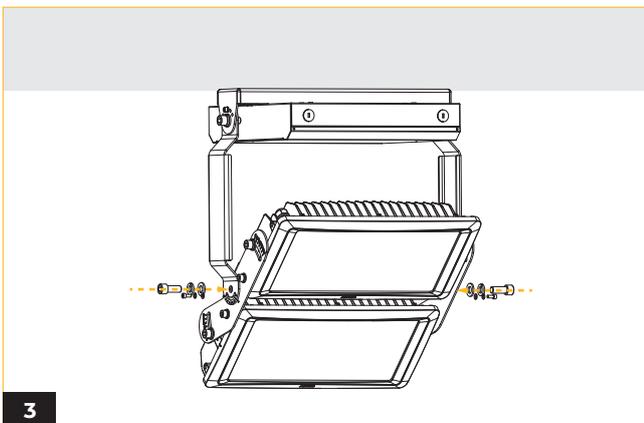

**3**

Secure the fixture to the bracket with provided screws.

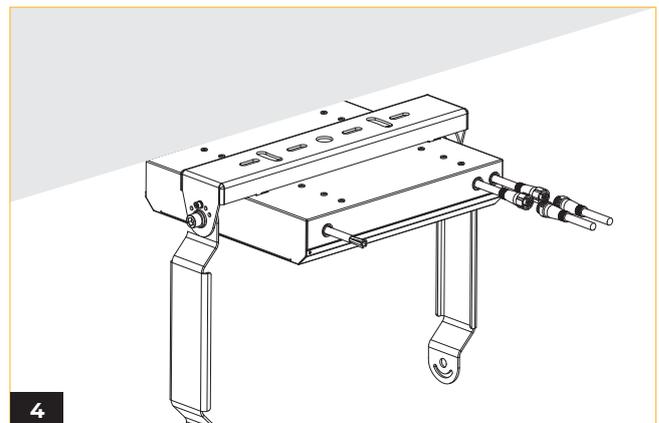

**4**

Connect quick connector cables between power box and fixture. Making sure to connect the AC wires (refer to wiring diagram).

**WIRING DIAGRAM**

---

SPV 0-10V

\*Not to scale

