

BOLT NOVA

SPECIFICATION SHEET
ARCHI-COLOR™ RGBW

NEXT GEN NATATORIUM-RATED RGBW FLOODLIGHT

Housing

Diameter : 23" x 28.9" x 16" (500W), 23" x 41.3" x 20.4" (750W)

Weight : 44 lbs (500W), 77 lbs (750W)

Material

Housing : High Pressure Die-Cast Aluminum, Tempered Glass

Mounting : Corrosion-resistant fluorocarbon-coated steel

Lens : PC Lens

Power Input

500W, 750W | 277V, 347-480V

Lumen Output

41,910 lm (500W), 62,890 lm (750W)

Dimming

DMX : High resolution dims to 1%

DALI : DT6 (4 Channel) control dims to 1%

Color Quality

CRI 85

Rated Life

> 100,000 Hours (L70)

Finish



Black



White

Color Temperature



3000K

+



Archi-Color™ RGBW

Optics



30°



60°



Asymmetric

Mounting



Stem
Mount



Adjustable
Cable Mount

Warranty

7 Year limited warranty

Listing



IK10

Evolved With Color To Excel In Challenging Environments

We've enhanced the acclaimed Bolt Nova, taking its proven durability and natatorium-ready engineering a step further. This new variation adds full RGBW color capabilities to the robust, IP66-rated, corrosion-resistant package you trust.

Now featuring both direct and indirect mounting options, the Bolt Nova RGBW delivers the same reliable performance with the added power of dynamic color control for any demanding sports or aquatic environment.



METEOR

meteor-lighting.com

SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

BLTNL	MODEL	BOLT NOVA-NOVALINK EDITION		
	DIRECTION	D Down	U Up	
	WATTAGE	500 500W	750 750W	
C308	CCT / CRI	C308 RGBW + 3000K / CRI 85		
	VOLTAGE	277 277V	HVT 347-480V	
	DIMMING	DMX DMX dims to 1%	DALI DT6 (4 Channel) control dims to 1%	
	BEAM ANGLE	30 30°	60 60°	ASY Asymmetric
	FINISH	BLK Black	WHT White	
	MOUNTING	ST2 Stem 2 ft AD10P Adjustable Cable 10ft With Power Cord	ST4 Stem 4 ft	ST6 Stem 6 ft
	ACCESSORIES	GSV¹ Glare Shield Visor	WG² Wire Guard (IK10 Rating)	
	RATING	OUT³ Outdoor Rating	NAT⁴ Natatorium Rating	

 CLEAR FORM

¹ Please factor in change in lumen output with GSV, lumen output is -5% with asymmetric beam angles and -15% with other optics

² Please factor in change in lumen output of -30% with Wire Guard

³ Outdoor Rating: Coating and wiring will be changed to high UV resistant and corrosion resistant materials for long term operation in outdoor environments

⁴ Natatorium rating: Coating and sealant will be changed to high corrosion resistant materials to prevent damage from long term exposure to chlorine vapors

TECHNICAL DETAILS

Electrical

- 41,910 lm (500W)
- 62,890 lm (750W)
- Power Input : High Voltage Range (277-480V)
- Operating Temperature : -40°F~121°F
- Surge Protection : Built-in is 20KV

LED Features

- Color Temperature : 3000K + Archi-Color™ RGBW
- CRI 85
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs

Optics

- Precision molded high transmittance clear PC lens
- Beam Angle : 30°, 60°, Asymmetric

Advanced Dimming

- DMX : High resolution dims to 1%
- DALI : DT6 (4 Channel) control dims to 1%

Housing

- Diameter : 23" x 28.9" x 16" (500W), 23" x 41.3" x 20.4" (750W)
- Material : High Pressure Die-Cast Aluminum, Corrosion-resistant fluorocarbon-coated steel, Tempered Glass
- Weight : 44 lbs (500W), 77 lbs (750W)

Mounting

- Stem 2 ft / 4 ft / 6 ft
- Adjustable Cable 10ft

Warranty

- 7-year limited warranty

Listing

- ETL Wet Location Listed
- FCC
- IP66
- IK10 (Wire Guard)

PERFORMANCE SUMMARY*


Delivered Lumens					Current Consumption			
CCT/WATTAGE	R	G	B	W	WATTAGE / VOLT	277V	347V	480V
500W	125W	125W	125W	125W	500W	1.99A	1.59A	1.15A
	8,660lm	16,000lm	4,490lm	12,760lm	750W	2.98A	2.38A	1.72A
750W	188W	188W	188W	188W				
	13,000lm	24,000lm	6,740lm	19,150lm				

*Beam Angle: 60° *Tolerance ±8%


PHOTOMETRICS*

Below is a typical photometric representation of the Bolt Nova fixture. Please download IES files to ensure exact photometric value.


*35° Tilt




30°DIRECT

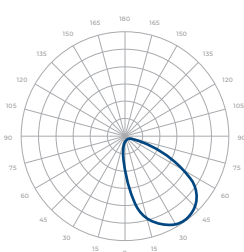


60°DIRECT

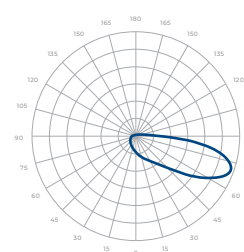


ASYMMETRIC DIRECT

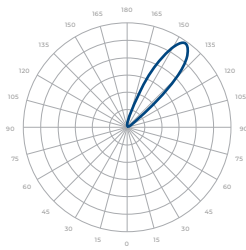

30° INDIRECT

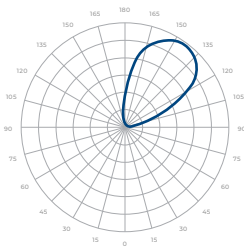


60° INDIRECT

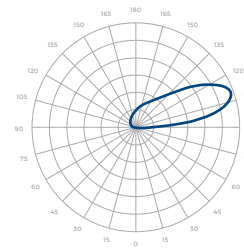


ASYMMETRIC INDIRECT

DIMENSIONS

500W Stem

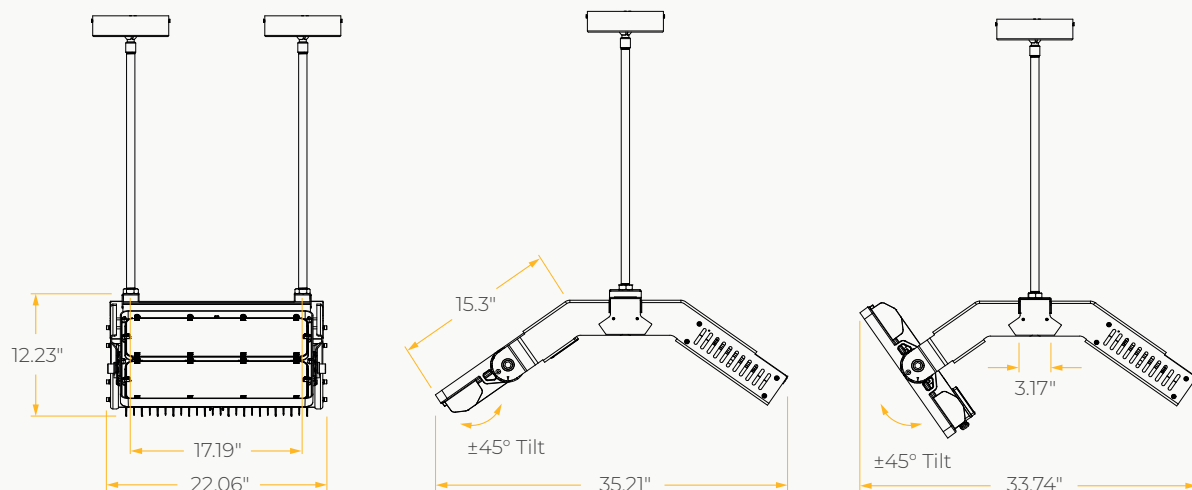


750W Stem

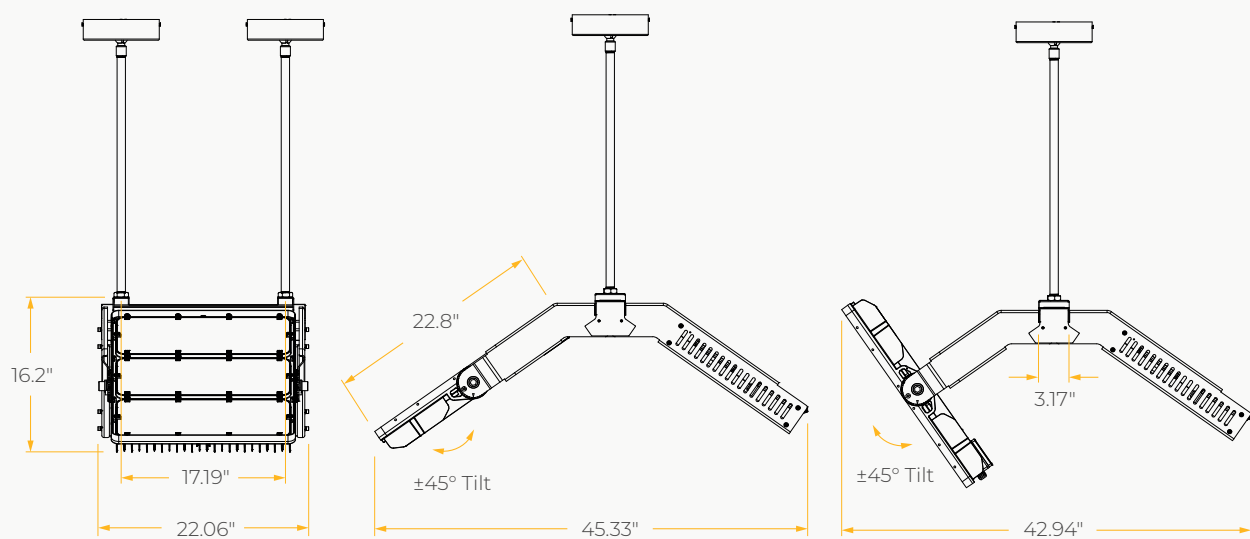


DIMENSIONS

500W Adjustable Cable

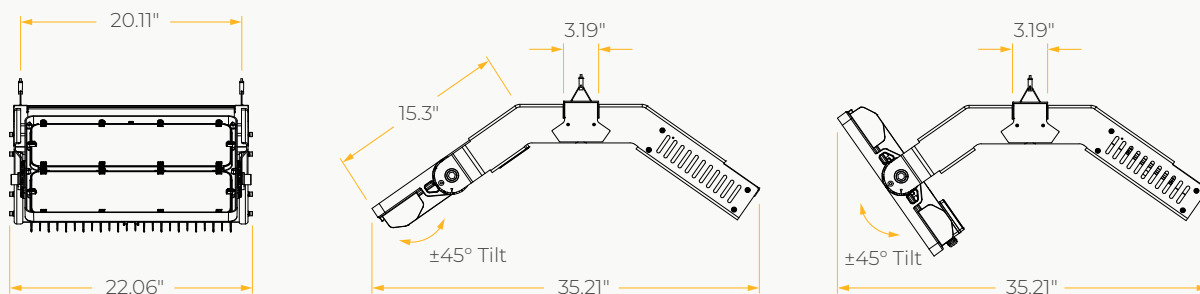


750W Adjustable Cable

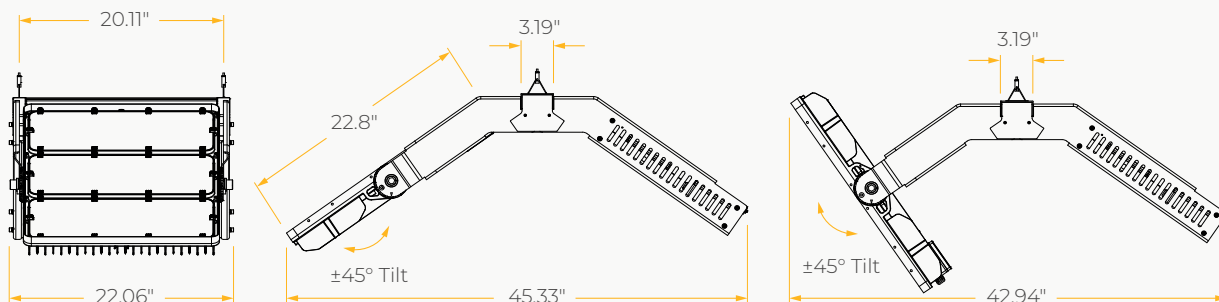

ACCESSORIES

500W / 750W Glare Shield Visor For 30°/60°

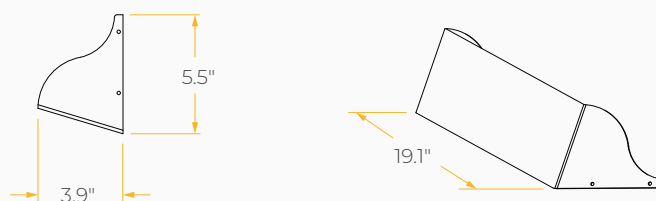

500W / 750W Glare Shield Visor For Asymetric



500W / 750W Wire Guard

