

DOT 2

AESTHETIC MICROCYLINDER SMALL BEYOND COMPARE

SPECIFICATION SHEET

Housing

Diameter : Ø2.5" | Height : 8.5" | Weight : 1.9 lbs

Material

Housing : Extruded Aluminum

Lens : TIR Polycarbonate Lens

Power Input

10W, 15W, 20W | 120-277V

Lumen Output

1,070 lm (10W), 1,600 lm (15W), 2,150 lm (20W)

Dimming

Superior 0-10V : dims to 1%, dims to dark

Linear line-voltage phase control, dims to 1%

TRC : Linear line-voltage phase control, dims to 1%


Color Quality

CRI 85, CRI 93 | UGR ≤ 19

Rated Life

> 100,000 Hours (L70)

Finish



Black

White

Color Temperature



2700K

3000K

3500K

4000K

Optics



20°

30°

45°

60°

Mounting



Stem
Mount

Cord
Mount

Surface
Mount

Stem
Adjustable

Surface
Adjustable

Warranty

5 Year limited warranty


Listing



One Microcylinder Family To Rule Them All

The Dot 2.5 micro cylinders come with a delivered lumen package of up to 2,150 lm. Available in black and white finishes, a variety of mounting options, and accessories.

Two years on from the introduction of the Dot series, we have now expanded the line to include even smaller apertures and greater optical, and design accessories. Offering optimal balance between diminutive design and high performance.

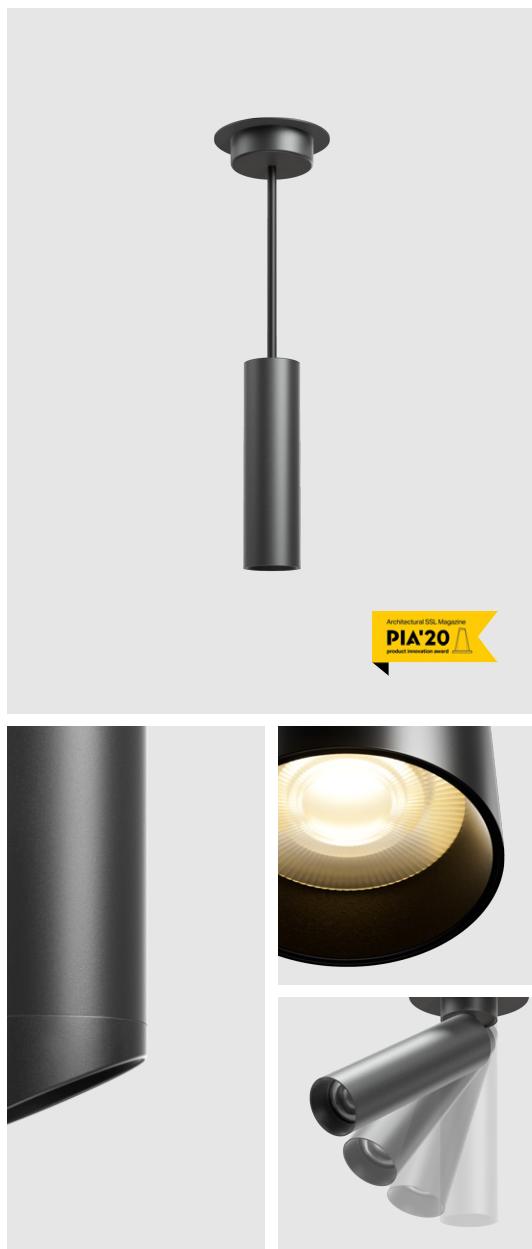

METEOR

meteor-lighting.com

SPECIFICATION SHEET**DOT 2**AESTHETIC MICROCYLINDER
SMALL BEYOND COMPARE**METEOR****SPECIFICATION****PROJECT NAME****DATE****CATALOG #****QUANTITY***The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.*

DT2	MODEL	DOT 2		
	WATTAGE	10 10W	15 15W	20 20W
	CCT / CRI	278 2700K / CRI 85 279 2700K / CRI 93 408 4000K / CRI 85	308 3000K / CRI 85 309 3000K / CRI 93	358 3500K / CRI 85 359 3500K / CRI 93
UNV	VOLTAGE	UNV 120 – 277V		
	DIMMING	SPV Superior 0-10V dims to 1%, dims to dark	TRC¹ Linear line-voltage phase control, dims to 1%	
	BEAM ANGLE	20 20° 60 60°	30 30°	45 45°
	FINISH	BLK Black	WHT White	
	MOUNTING	SUM Surface Mount ST2 Stem Mount 2ft ST4A Stem 4ft Adjustable	SA Surface Adjustable ST4 Stem Mount 4ft	CM10 Cord Mount 10ft ST2A Stem 2ft Adjustable
	ACCESSORIES	HC^{2,5} Hex Cell Louver FCS⁶ Field Cut Stem Adapter Kit	SL^{3,5} Solite Lens	SSB^{4,5} Spot Shield Bezel

CLEAR FORM¹ TRC is only compatible with 120V² HC option reduces delivered lumens by ~30%³ SL option reduces delivered lumens by ~15%⁴ SSB option reduces delivered lumens by ~20%, and SSB is not compatible with SA, ST2A, ST4A⁵ Only one option within this group can be specified⁶ FCS is not compatible with SUM, CM10, SA, ST2A, ST4A

TECHNICAL DETAILS

Electrical

- 1,070 lm (10W), 1,600 lm (15W), 2,150 lm (20W)
- Power Input : Universal (120-277V)
- Operating Temperature : 14°F~95°F
- Surge Protection : Built-in is 2.5kV
- Integral Driver on all product configurations

LED Features

- Color Temperature : 2700K, 3000K, 3500K, 4000K
- CRI 85, CRI 95
- UGR ≤ 19
- Long life LED system designed for typical TM21 lumen maintenance ≥ L70 @ 100,000Hours

Optics

- TIR Polycarbonate Lens
- Beam Angle : 20°, 30°, 45°, 60°

Advanced Dimming

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting
- Superior 0-10V : dims to 1%, dims to dark
- Linear line-voltage phase control, dims to 1%
- TRC : Linear line-voltage phase control, dims to 1%

Housing

- Diameter : Ø2.5"
- Height : 8.5"
- Material : Extruded Aluminum
- Weight : 1.9 lbs

Mounting

- Surface Mount
- Surface Adjustable Mount (355° Rotation / 90° Tilt)
- Stem Mount 2ft or 4ft
- Stem Adjustable Mount 2ft or 4ft (355° Rotation / 90° Tilt)
- Cord Mount 10ft

Warranty

- 5-year limited warranty

Listing

- ETL Damp Location Listed
- CE
- FCC
- JA8 Title 24 Compliant

PERFORMANCE SUMMARY*

STD (Standard)				
CCT/WATTAGE	2700K	3000K	3500K	4000K
10W	1,000lm	1,040lm	1,060lm	1,070lm
15W	1,450lm	1,550lm	1,580lm	1,600lm
20W	1,950lm	2,050lm	2,100lm	2,150lm

Current Consumption		
WATTAGE / VOLT	120V	277V
10W	0.09A	0.04A
15W	0.14A	0.06A
20W	0.18A	0.09A

*Beam Angle: 60° * Tolerance ±8%

*For specifications requiring a CRI of 93, apply a 0.85 multiplier to the lumen output values listed.

SPECIFICATION SHEET


DOT 2

AESTHETIC MICROCYLINDER
SMALL BEYOND COMPARE


METEOR

PHOTOMETRICS


Below is a typical photometric representation of the Dot 2 fixture. Please download IES files to ensure exact photometric value.




20°



30°

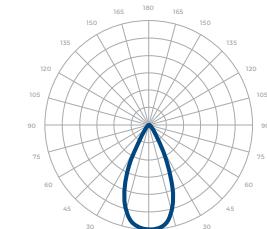


45°




60°

ACCESSORIES

Hex Cell Louver

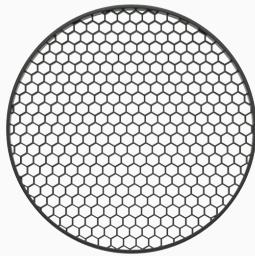


Solite Lens

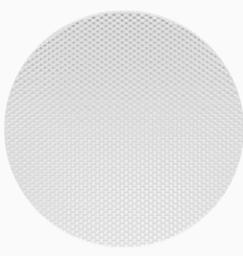

Spot Shield Bezel






DIMENSIONS

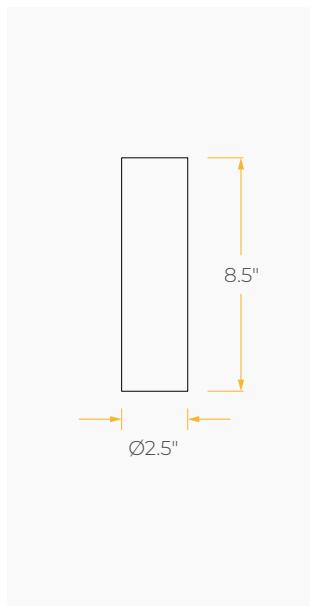

MOUNTING OPTIONS*

*Junction Box not included

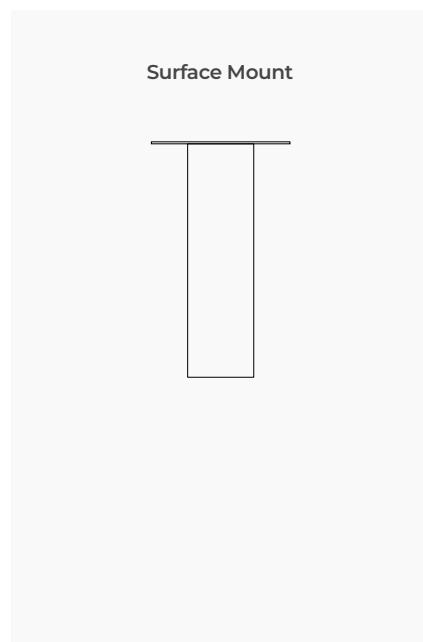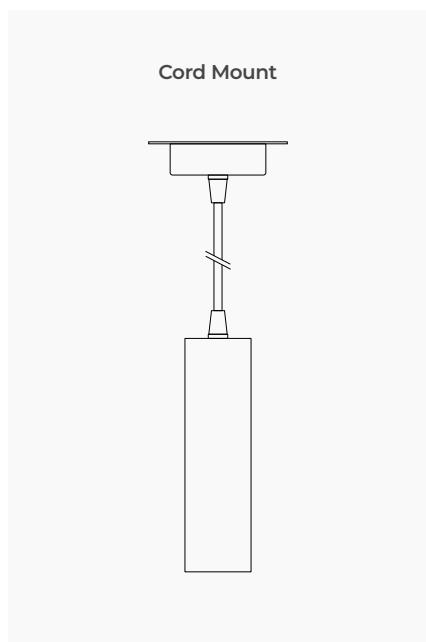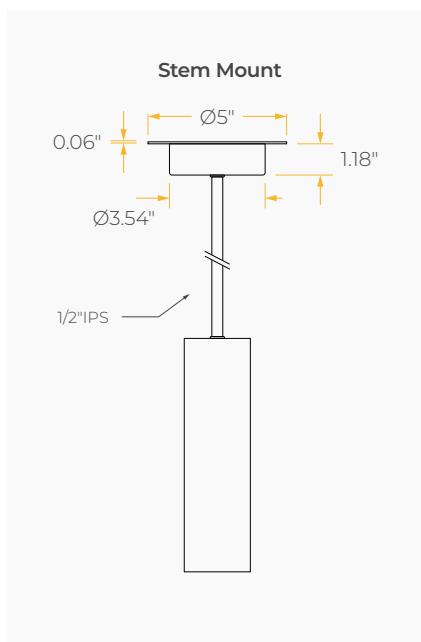

MOUNTING OPTIONS*

*Junction Box not included

