

# REV FLEX 4

SPECIFICATION SHEET  
RETROFIT

## REVOLUTIONARY ADJUSTABLE DOWNLIGHTS

### Housing

Aperture : Ø3.7" | Height : 5" | Weight : 1.96 lbs  
Maximum Ceiling Thickness : 1" | Ceiling Cutout : 4"

### Material

Housing : High Pressure Die-Cast Aluminum  
Optics : Aluminum Reflector

### Power Input

15W, 20W, 40W | 120V, 277V

### Lumen Output

1,040 lm (15W), 1,540 lm (20W), 3,080 lm (40W), 4,515 lm (40W Prime)

### Dimming

Superior 0-10V : dims to 1%, dims to dark  
TRC : Line-voltage phase control : Dims to 1%  
DMX : High resolution dims to 0.1%  
DALI : Logarithmic dims to 1%

### Color Quality

CRI 85, CRI 93

### Rated Life

> 100,000 Hours (L70)

### Bezel Finish



Matte  
Black



Matte  
White



Matte  
Silver

### Trim Finish



Matte  
Black



Matte  
White

### Color Temperature



2700K



3000K



3500K



4000K

### Optics



20°



40°



50°

### Adjustability



0°-30°  
Tilt



0°-359°  
Rotation

### Warranty

5 Year limited warranty

### Listing



## Quiet . Adjustable. Color Changing.

The new REV Flex series is an extension of Meteor's revolutionary downlights with an adjustable factor. Coming in a range of 2", 4" and 6" apertures. The REV Flex series feature 359° rotation, 30° tilt, and a variety of architectural illumination options.

All REV Flex configurations are Title 24 listed, and compatible with our proprietary high efficacy Archi-Color™ color changing technology W+RGB. Also features built-in Flicker-Free video recording with our VX™ Driver.



# METEOR

[meteor-lighting.com](https://meteor-lighting.com)

## SPECIFICATION

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

|                                   |              |                                                                 |                                                                                           |                                                                                    |
|-----------------------------------|--------------|-----------------------------------------------------------------|-------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|
| <input type="text" value="RF4R"/> | MODEL        | REV FLEX 4 RETROFIT                                             |                                                                                           |                                                                                    |
| <input type="text"/>              | WATTAGE      | 15 15W<br>40P <sup>1,2</sup> 40W Prime                          | 20 20W                                                                                    | 40 40W                                                                             |
| <input type="text"/>              | BEZEL TYPE   | A Adjustable Bezel                                              | F <sup>3</sup> Fixed Cut-off Bezel                                                        | W <sup>4</sup> Wallwash Bezel                                                      |
| <input type="text"/>              | CCT / CRI    | 278 2700K / CRI 85<br>309 3000K / CRI 93<br>408 4000K / CRI 85  | 279 2700K / CRI 93<br>358 3500K / CRI 85<br>409 4000K / CRI 93                            | 308 3000K / CRI 85<br>359 3500K / CRI 93                                           |
| <input type="text"/>              | VOLTAGE      | 120 120V                                                        | 277 277V                                                                                  |                                                                                    |
| <input type="text"/>              | DIMMING      | NOD Non-Dimming<br>DMXP DMX dims to 0.1%<br>(Phoenix Connector) | SPV Superior 0-10V dims to 1%,<br>dims to dark<br>DMXR DMX dims to 0.1%<br>(RJ45 Sockets) | TRC <sup>5</sup> Line-voltage phase control,<br>dims to 1%<br>DALI DALI dims to 1% |
| <input type="text"/>              | TRIM TYPE    | R Round<br>SF <sup>6</sup> Square Flangeless                    | S Square                                                                                  | RF <sup>6</sup> Round Flangeless                                                   |
| <input type="text"/>              | TRIM FINISH  | BLK Matte Black                                                 | WHT Matte White                                                                           |                                                                                    |
| <input type="text"/>              | BEZEL FINISH | BLK Matte Black                                                 | WHT Matte White                                                                           | SLV Matte Silver                                                                   |
| <input type="text"/>              | BEAM ANGLE   | 20 20°                                                          | 40 40°                                                                                    | 50 50°                                                                             |
| <input type="text"/>              | ACCESSORIES  | HC <sup>7</sup> Hex Cell Louver                                 | GR5 Goof Ring 4"-5.8"                                                                     |                                                                                    |

<sup>1</sup> Option is not compatible with F, W bezel types<sup>2</sup> Option is not compatible with S, SF trim types<sup>3</sup> Fixed Cut-off Bezel is not compatible with HC accessory<sup>4</sup> Wallwash bezel are always silver in color<sup>5</sup> Option is only compatible with 120V<sup>6</sup> Flangeless trims are always white in color<sup>7</sup> Please factor in change in lumen output of -25% with HC

**TECHNICAL DETAILS****Electrical**

- 1,040 lm (15W), 1,540 lm (20W), 3,080 lm (40W), 4,515 lm (40W Prime)
- Power Input : 120V or 277V
- Operating Temperature : 14°F~104°F

**LED Features**

- Color Temperature : 2700K, 3000K, 3500K, 4000K
- CRI 85, CRI 93
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs

**Optics**

- Precision molded high transmittance clear glass
- Beam Angle : 20°, 40°, 50°

**Advanced Dimming**

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting
- Superior 0-10V : dims to 1%, dims to dark
- TRC : Line-voltage phase control: Dims to 1% (120V only)
- DMX : High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)
- DALI : Logarithmic dims to 1%

**Housing**

- Aperture : Ø3.7"
- Height : 5"
- Weight : 1.96 lbs
- Ceiling Cutout : 4"
- Maximum Ceiling Thickness : 1"
- Material : High Pressure Die-Cast Aluminum, Glass, Aluminum Reflector
- Non-IC Rated, insulation must be kept >0.5ft from housing.
- Light engine, optics, and driver(s) accessible from below ceiling

**Warranty**

- 5-year limited warranty

**Listing**

- ETL
- CE
- FCC
- JA8 Title 24 Compliant

**PERFORMANCE SUMMARY\***

| Delivered Lumens |         |         |         |         |
|------------------|---------|---------|---------|---------|
| CCT/WATTAGE      | 2700K   | 3000K   | 3500K   | 4000K   |
| 15W              | 920lm   | 980lm   | 1,000lm | 1,040lm |
| 20W              | 1,280lm | 1,350lm | 1,440lm | 1,540lm |
| 40W              | 2,550lm | 2,690lm | 2,880lm | 3,080lm |
| 40W (Prime)      | 4,130lm | 4,385lm | 4,490lm | 4,515lm |




| Current Consumption |       |       |
|---------------------|-------|-------|
| WATTAGE / VOLT      | 120V  | 277V  |
| 15W                 | 0.13A | 0.06A |
| 20W                 | 0.17A | 0.07A |
| 40W                 | 0.4A  | 0.15A |

\*Beam Angle: 50° \*Tolerance ±8%

\*For specifications requiring a CRI of 85, apply a 0.8 multiplier to the lumen output values listed.

**PHOTOMETRICS**

Below is a typical photometric representation of the Rev Flex 4 fixture. Please download IES files to ensure exact photometric value.




## DMX REQUIREMENTS


The REV Flex 4 fixture with DMX is a **single channel dmx** unit. When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

The fixture can be connected with RJ45 Socket or Phoenix Connector. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

| CONNECTION | RJ45 (CAT5e)                      |
|------------|-----------------------------------|
| Common     | WHITE/BROWN(PIN7) & BROWN (PIN 8) |
| Signal -   | ORANGE (PIN 2)                    |
| Signal +   | WHITE/ORANGE (PIN 1)              |
| Spare      | -                                 |
| Spare      | -                                 |



RJ45 Sockets

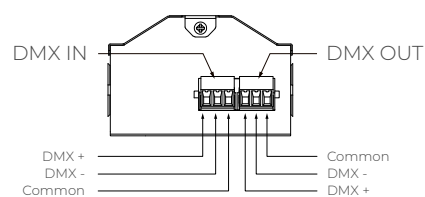

Phoenix Connector

## COMPATIBLE DMX CABLING LIST

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable **must not be used to carry DMX**. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 or Belden 9841 for DMX installation. Belden 9729/9841 is a shielded twisted pair cable, which allows for a spare pair for 'out and back' type terminations if needed.


## TRIM TYPES




Round Trim









Round Flangeless Trim





Square Trim



Square Flangeless Trim

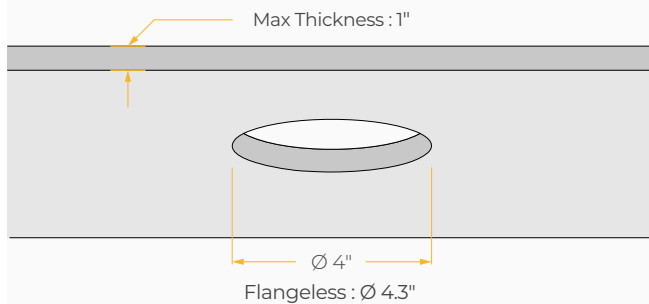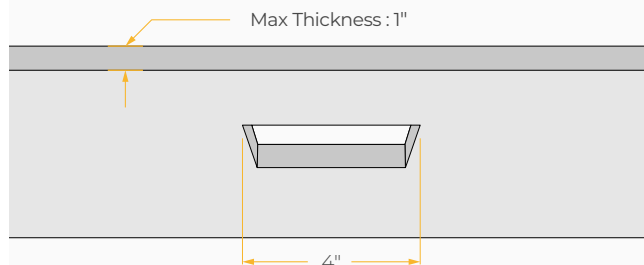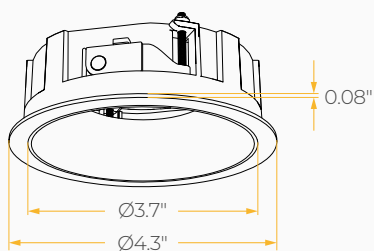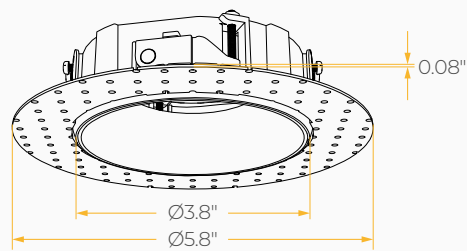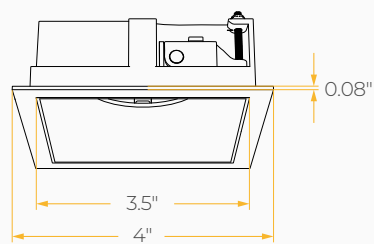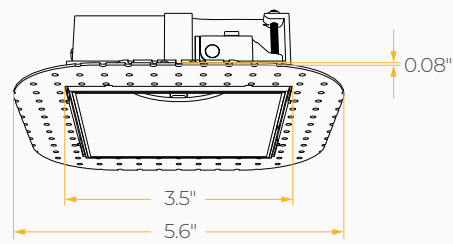**DIMENSIONS****Round Trim Cutout****Square Trim Cutout****Round Trim****Round Flangeless Trim****Square Trim****Square Flangeless Trim**

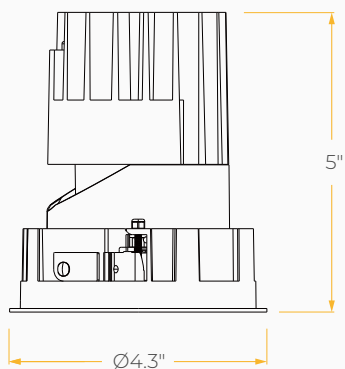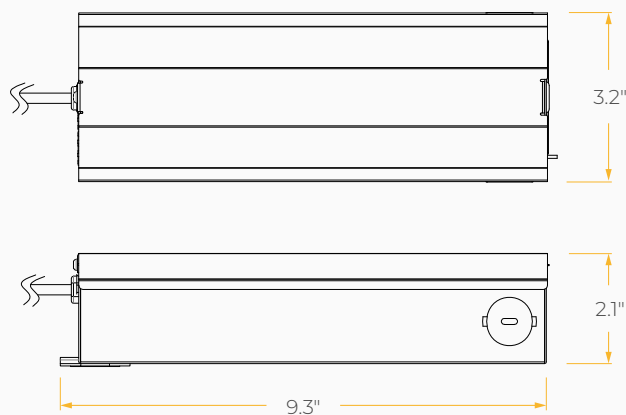**DIMENSIONS****Power Box****Goof Ring**