


REV HYDRO 4 & 6

INSTALLATION GUIDE
RETROFIT

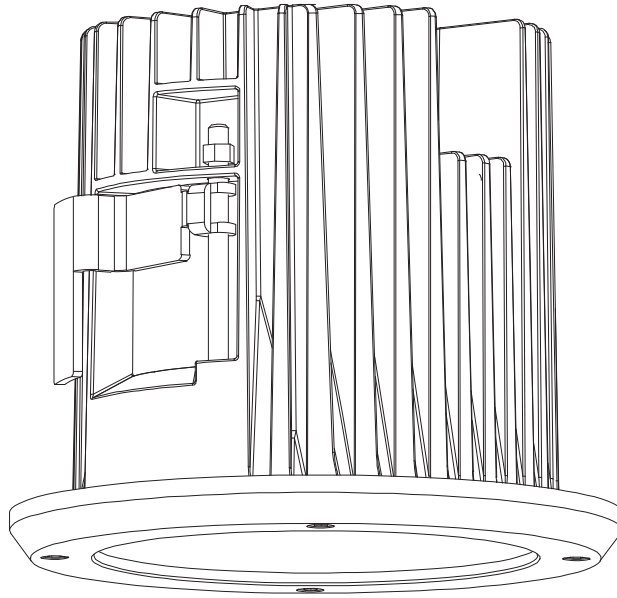


IMPORTANT SAFETY INFORMATION READ AND FOLLOW ALL SAFETY INSTRUCTIONS


**FOR FIELD ASSISTANCE PLEASE CALL
+1-213-255-2060 #4**

- Before wiring to power supply and during servicing or relamping, turn off power at fuse or circuit breaker.
- All servicing or relamping must be performed by qualified service personnel.
- Product must be grounded to avoid potential electric shock or other potential hazard.
- Product must be installed at locations and heights, in a manner consistent with its intended use, and in compliance with electrical code and local codes.


SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

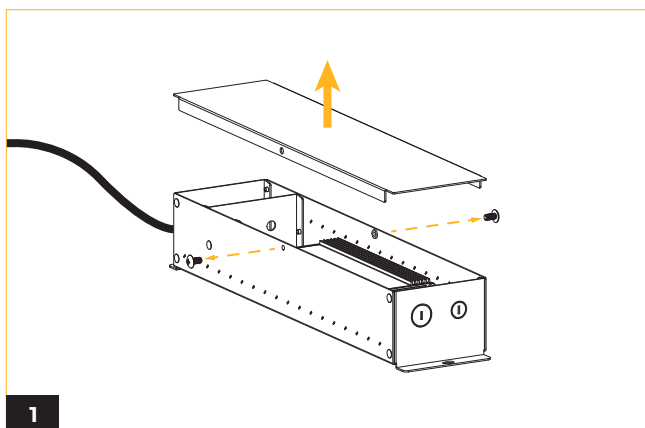


1
Remove the power box cover by unscrewing the two screws on each side.

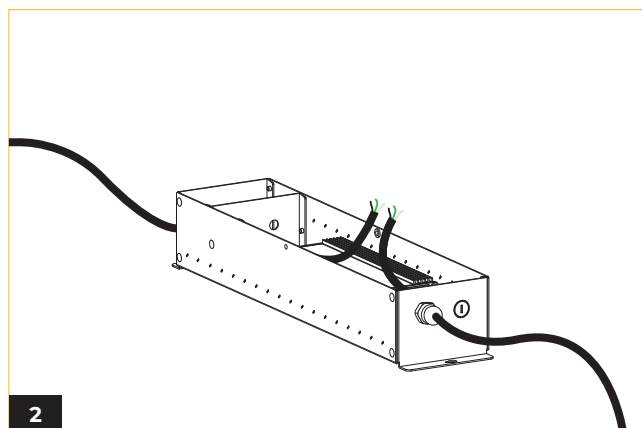


2
Establish electrical connections as shown in the wiring diagram.

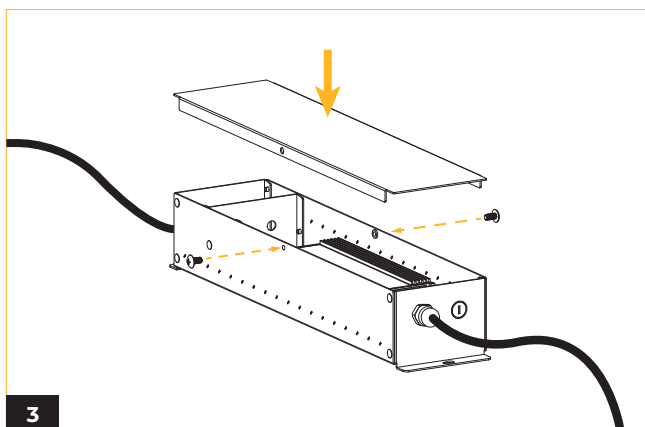


3
Reattach the power box cover by aligning it properly and securing it with the two screws on each side.

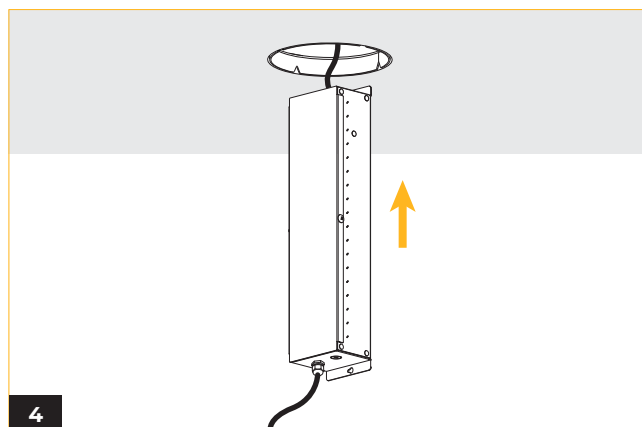


4
Insert the power box through the ceiling cutout.

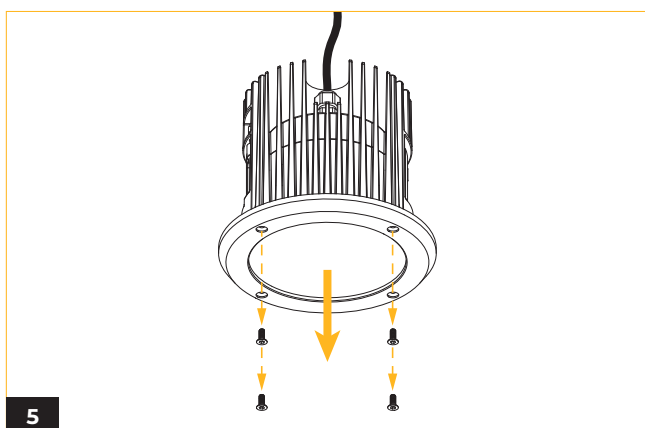


5
Remove the glass trim cover by unscrewing the four front screws.

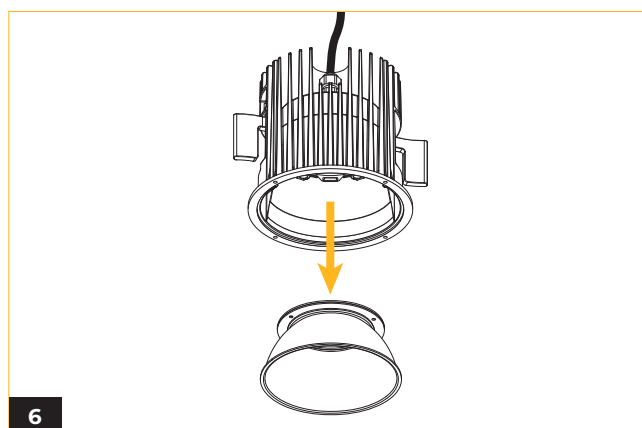


6
Detach the reflector from the fixture by carefully pulling it away from the magnets.

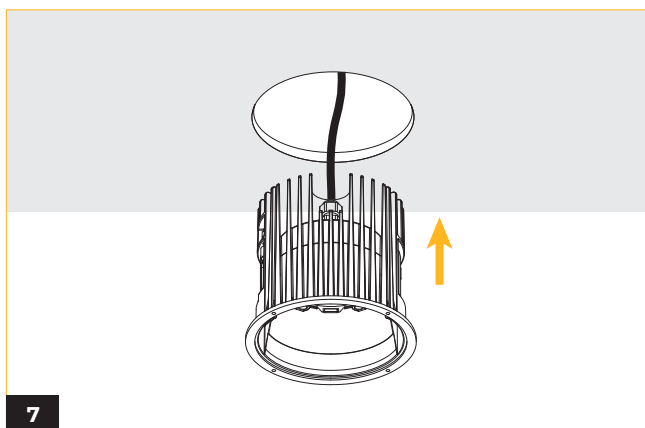


7
Install the downlight by inserting it through the ceiling cutout.

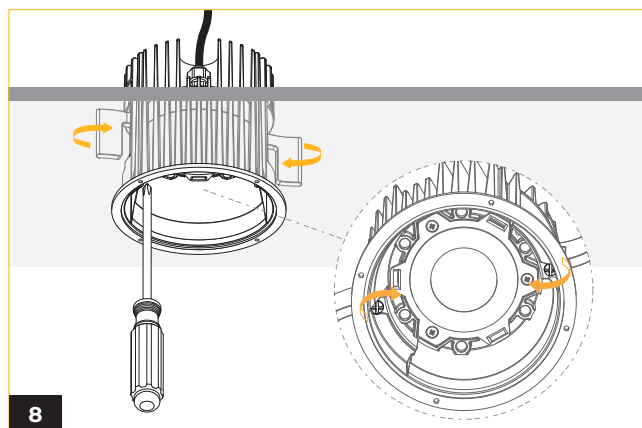

8
Using a screwdriver, tighten the screws to expand the two side brackets, securing the fixture firmly in place.

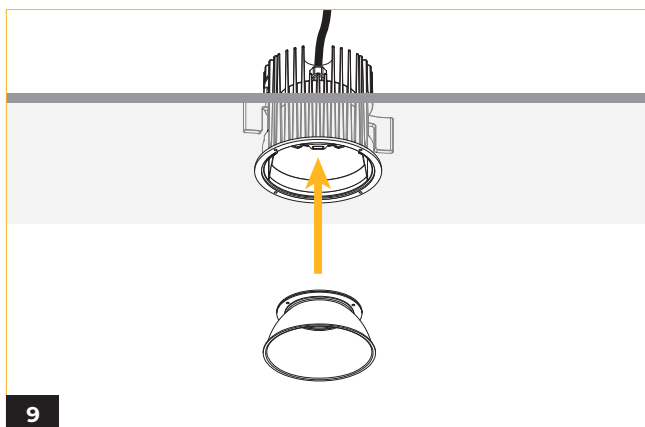

9
Reattach the reflector by aligning it with the fixture and securing it onto the magnets.

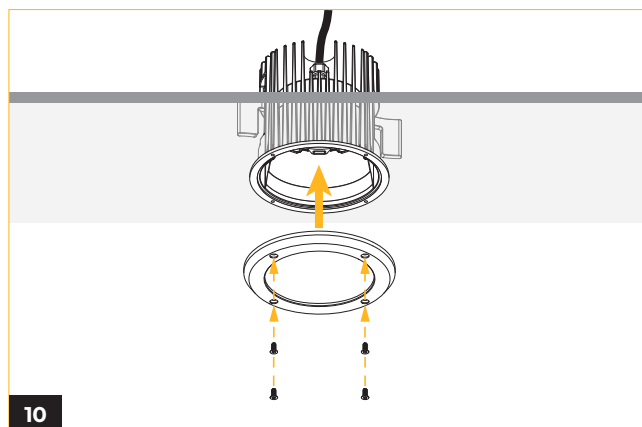


10
Reattach the glass trim cover by aligning it with the fixture and securing it with the four front screws.


WIRING DIAGRAM

STV


*Not to scale

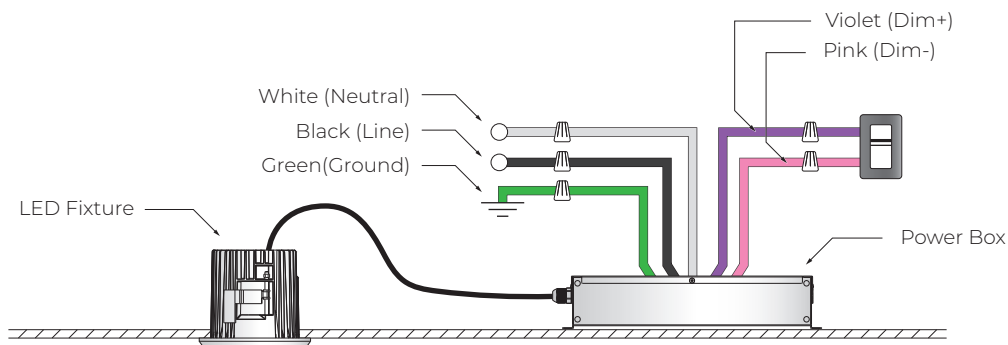

DALI

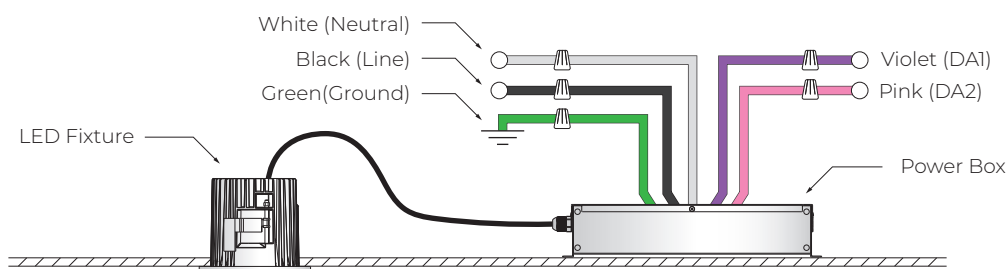


DMX (W+RGB)

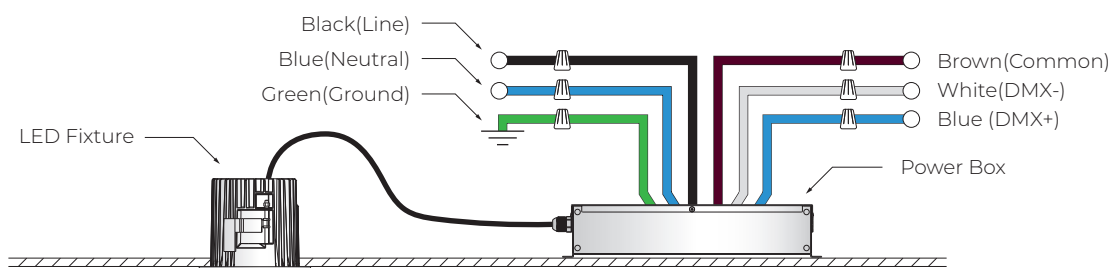

WIRING DIAGRAM

STV

*Not to scale

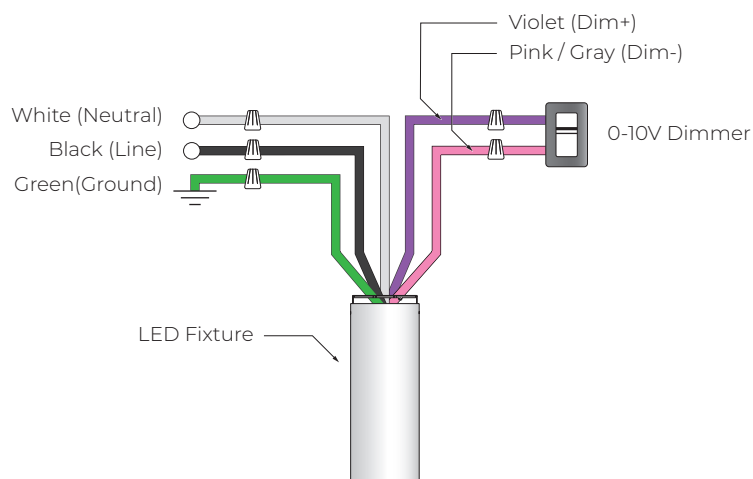

DALI

