

VELA 4

ARCHITECTURAL CYLINDERS WITH TRANSFORMATIVE PERFORMANCE

SPECIFICATION SHEET

Housing

Diameter : Ø4.2" | Height : 10.3" | Weight : 3.8 lbs

Material

Housing : High Pressure Die-Cast Aluminum, PC Shroud

Lens : Clear polycarbonate

Power Input

15W, 25W | 120-277V

Lumen Output

1,530 lm (15W), 2,400 lm (25W)

Dimming

Superior 0-10V : dims to 1%, dims to dark

TRC : Line-voltage phase control, dims to 1% (120V only)


DALI : Dims to 10%

Color Quality	Rated Life
CRI 85	> 100,000 Hours (L70)
Finish	Color Temperature
 Black	 3000K
 White	 3500K
	 4000K

Optics



Mounting

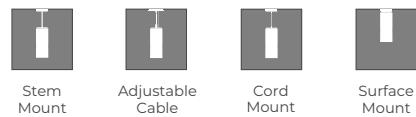

Warranty

5 Year limited warranty

Listing



All The Performance You Need In One Family

High performing 4-inch aperture cylinder with delivered lumen package of 1,530 – 2,400 lm.

Available with aluminum and polycarbonate shroud accessories.

Suitable for general illumination for a wide variety of project applications.



METEOR

meteor-lighting.com

SPECIFICATION SHEET**VELA 4**ARCHITECTURAL CYLINDERS
WITH TRANSFORMATIVE PERFORMANCE**SPECIFICATION**

PROJECT NAME

DATE

CATALOG #

QUANTITY

The product configurator function on this page works only with the latest version of Chrome or Adobe Acrobat Reader.

VA4	MODEL	VELA 4		
	WATTAGE	15 15W	25 25W	
	CCT / CRI	308 3000K / CRI 85	358 3500K / CRI 85	408 4000K / CRI 85
UNV	VOLTAGE	UNV 120 – 277V		
	DIMMING	SPV Superior 0-10V dims to 1%, dims to dark	TRC ¹ Line-voltage phase control, dims to 1%	DALI DALI dims to 10%
	TYPE	STD Standard Cylinder FRS12 Frosted PC Shroud 12" ALS16 Aluminum Shroud 16"	PCS12 Polycarbonate Shroud 12" FRS16 Frosted PC Shroud 16"	PCS16 Polycarbonate Shroud 16" ALS12 Aluminum Shroud 12"
	BEAM ANGLE*	10 10° 55 55°	25 25° WD ² Wide	35 35°
	FINISH	BLK Black	WHT White	
	MOUNTING	SUM Surface Mount ST4 Stem 4ft	CM10 ³ Cord Mount 10ft AD10 Adjustable Cable 10ft	ST2 Stem 2ft SAD10 Sloped Adjustable Cable 10ft
	ACCESSORIES	CON ^{4,5,6} Conical Lens FCS ⁸ Field Cut Stem Adapter Kit NX ¹¹ NX Radio Module Standalone Module	EMP Remote Emergency Pack AWN ⁹ Lutron Athena Wireless Node Standalone Module NXC ¹² NX Radio Module Canopy	CT ⁷ Conduit Mount AWNC ¹⁰ Lutron Athena Wireless Node Canopy

CLEAR FORM¹ TRC is only compatible with 120V² WD option reduces delivered lumens by ~20%³ CM10 is not compatible with PCS, FRS, ALS, EMP⁴ CON is not compatible with STD⁵ CON comes in the same color as the selected type and is not compatible with FRS12⁶ CON option reduces delivered lumens by ~15% (~20% with FRS16)⁷ CT is not compatible with SUM, CM10⁸ FCS is not compatible with SUM, CM10, AD10, SAD10⁹ AWN is not compatible with TRC¹⁰ AWNC is not compatible with TRC, SUM, CM10¹¹ NX is not compatible with TRC, DALI¹² NXC is not compatible with TRC, DALI, SUM, CM10

* Beam Angle options are not compatible with PCS, FRS, ALS

TECHNICAL DETAILS**Electrical**

- 1,530 lm (15W) , 2,400 lm (25W)
- Power Input : Universal (120-277V)
- Operating Temperature : -13°F~112°F
- Surge Protection : Built-in is 4kV
- Remote Emergency Pack : Philips Bodine BSL20B2UEK55C11

LED Features

- Color Temperature : 3000K, 3500K, 4000K
- CRI ≥ 85
- Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs

Optics

- Precision molded high transmittance clear lenses
- Beam Angle : 10°, 25°, 35°, 55°, WD

Advanced Dimming

- Superior 0-10V : dims to 1%, dims to dark
- TRC : Line-voltage phase control, dims to 1% (120V only)
- DALI : Dims to 10%

Warranty

- 5-year limited warranty

Housing

- Diameter : Ø4.2"
- Material: High Pressure Die-Cast Aluminum, PC Shroud
- Height :
 - Standard - 10.3"
 - Polycarbonate Shroud 12" & Frosted PC Shroud 12" - 15.5"
 - Polycarbonate Shroud 16" & Frosted PC Shroud 16" - 18.5"
 - Aluminum Shroud 12" - 15.5"
 - Aluminum Shroud 16" - 18.5"
- Weight :
 - Standard - 3.8 lbs
 - Polycarbonate Shroud 12" & Frosted PC Shroud 12" - 4.9 lbs
 - Polycarbonate Shroud 16" & Frosted PC Shroud 16" - 4.9 lbs
 - Aluminum Shroud 12" - 5.1 lbs
 - Aluminum Shroud 16" - 5.1 lbs

Mounting

- Stem Mount 2ft or 4ft
- Cord Mount 10ft
- Surface Mount
- Adjustable Cable Mount 10ft
- Sloped Adjustable Cable 10ft

Listing

- ETL Damp Location Listed
- FCC
- CE

PERFORMANCE SUMMARY*

STD (Standard)			
CCT/WATTAGE	3000K	3500K	4000K
15W	1,480lm	1,510lm	1,530lm
25W	2,320lm	2,370lm	2,400lm

*Beam Angle: 55° * Tolerance ±8%

PCS (PC Shroud)			
CCT/WATTAGE	3000K	3500K	4000K
15W	1,300lm	1,310lm	1,350lm
25W	2,040lm	2,080lm	2,100lm

*Beam Angle: 55° * Tolerance ±8%

ALS (Aluminum Shroud)			
CCT/WATTAGE	3000K	3500K	4000K
15W	1,240lm	1,250lm	1,260lm
25W	1,920lm	1,960lm	2,000lm

*Beam Angle: 55° * Tolerance ±8%

FRS (Frosted PC Shroud)			
CCT/WATTAGE	3000K	3500K	4000K
15W	1,110lm	1,120lm	1,160lm
25W	1,750lm	1,780lm	1,800lm

*Beam Angle: 55° * Tolerance ±8%

Current Consumption		
WATTAGE / VOLT	120V	277V
15W	0.14A	0.06A
25W	0.23A	0.10A

SPECIFICATION SHEET





VELA 4

ARCHITECTURAL CYLINDERS
WITH TRANSFORMATIVE PERFORMANCE

METEOR

PHOTOMETRICS

Below is a typical photometric representation of the Vela 4 fixture. Please download IES files to ensure exact photometric value.



COLOR FINISH

Black Finish



White Finish



ACCESSORIES

Polycarbonate Shroud



Frosted PC Shroud



Aluminum Shroud



Polycarbonate Shroud
With Conical Lens



Frosted PC Shroud
With Conical Lens






Aluminum Shroud
With Conical Lens





DIMENSIONS



DIMENSIONS

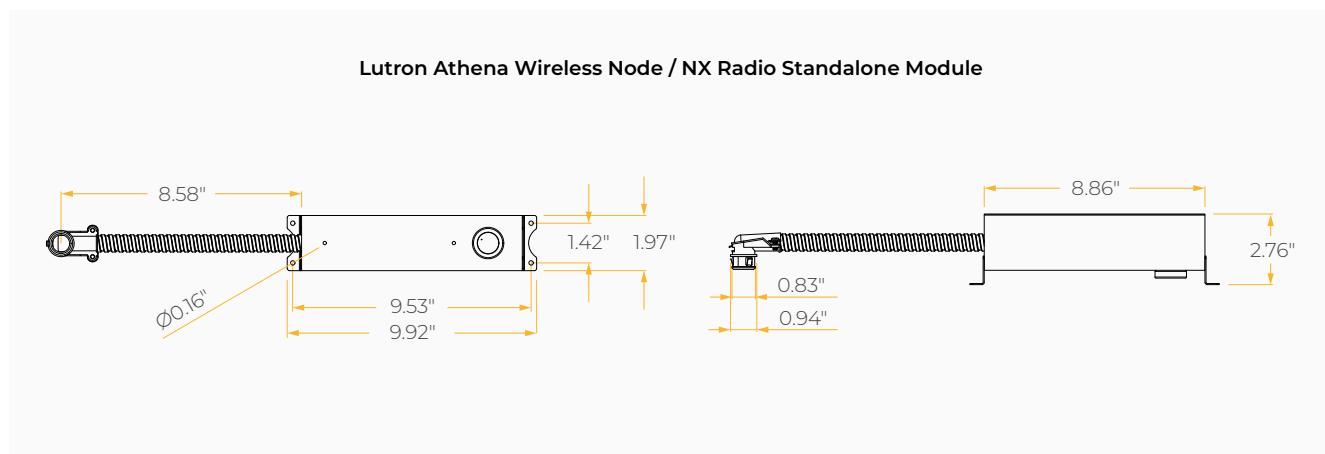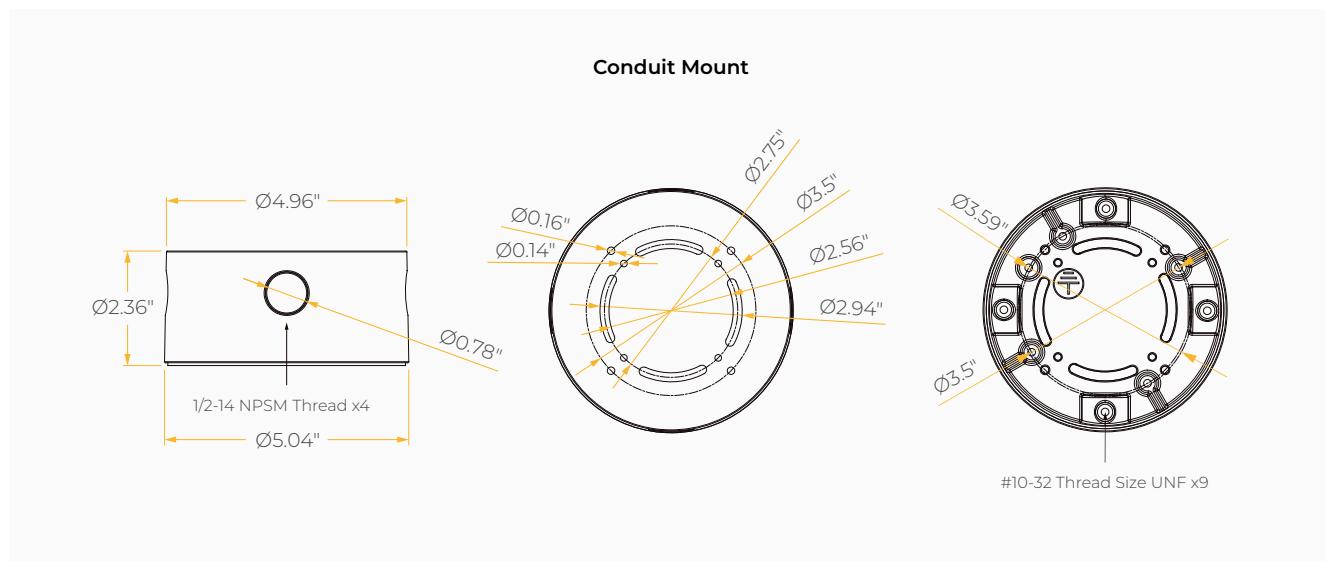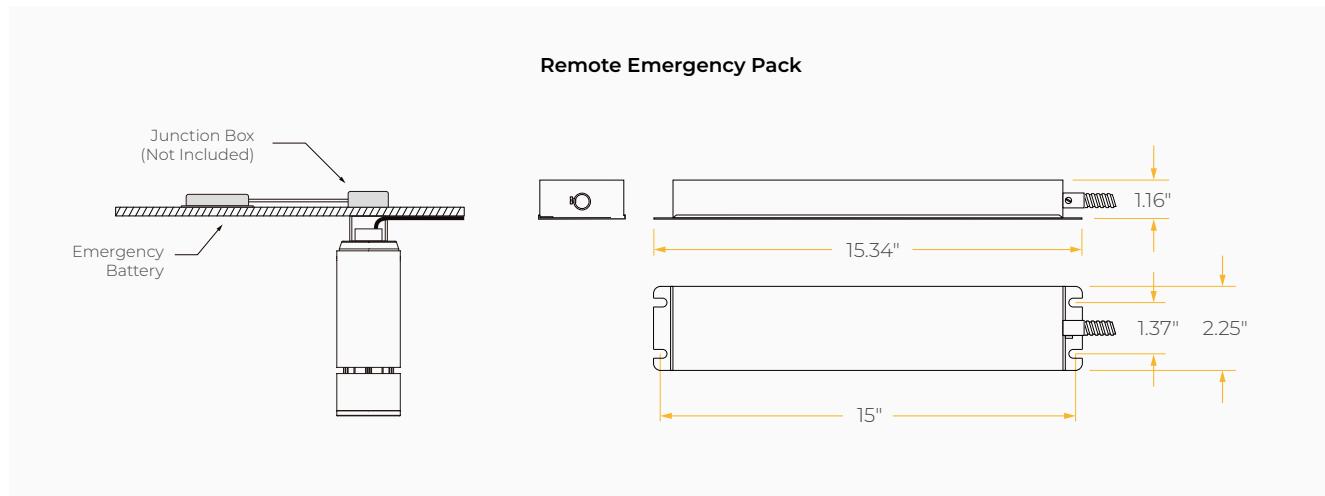


DIMENSIONS

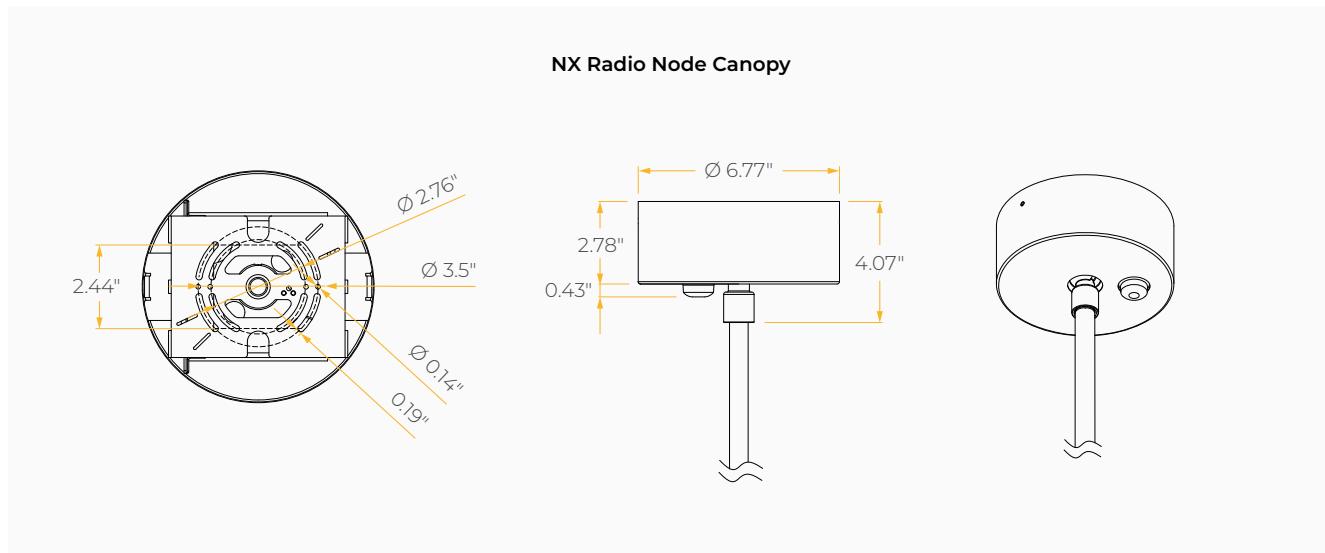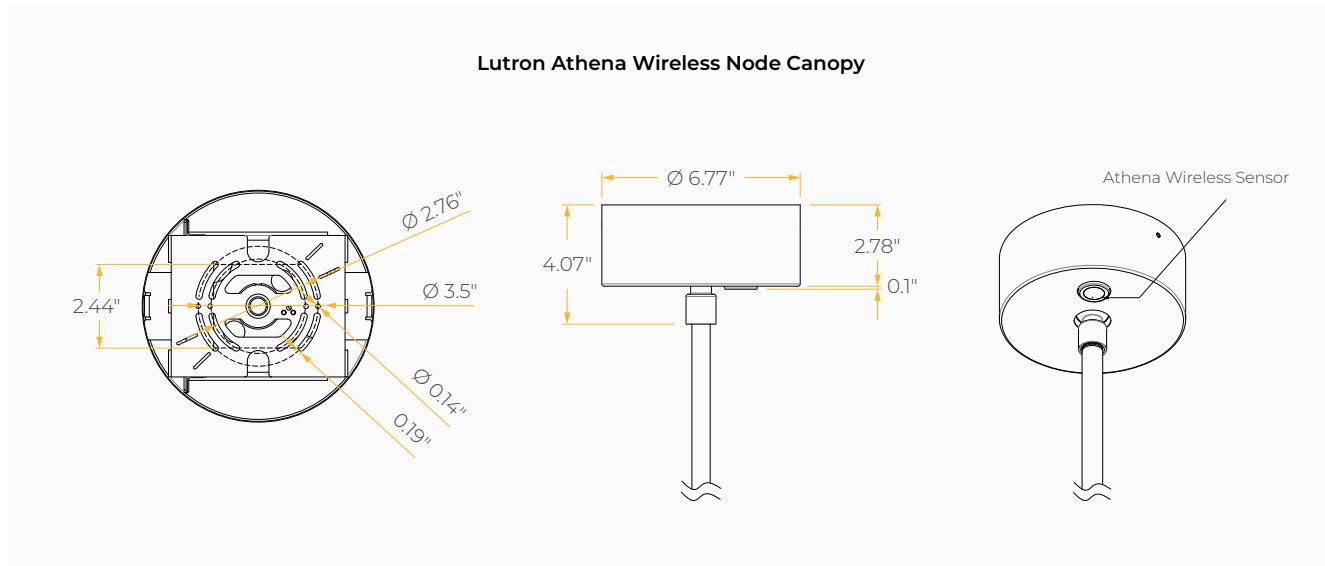


MOUNTING OPTIONS*

*Junction Box not included


Stem Mount

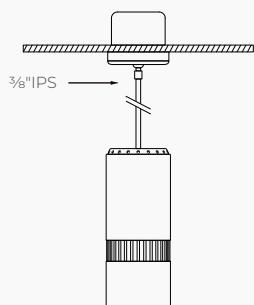


Adjustable Cable Mount

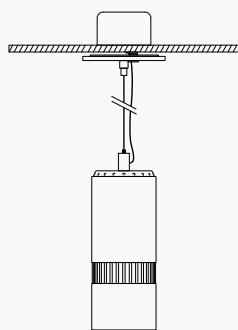

Sloped Adjustable Cable Mount

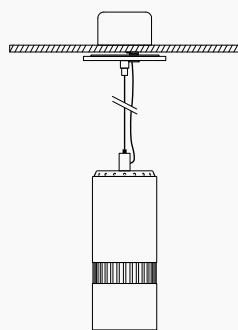

Cord Mount

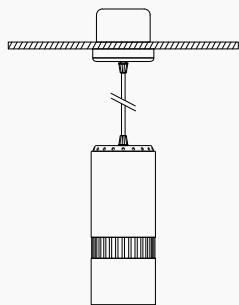

Surface Mount

