

# HIGH-PERFORMANCE VERSATILE CYLINDER

### Housing

Diameter: Ø8.1" | Height: 21.5" | Weight: 20 lbs

#### Material

Housing: High Pressure Die-Cast Aluminum Optics: Metal Reflector

#### **Power Input**

W+RGB:

100W(White=50W, RGB=50W) | 120-277V 160W(White=80W, RGB=80W) | 120-277V

W+Hue:

100W(White=66W, HSV=33W) | 120-277V 150W(White=100W, HSV=50W) | 120-277V

#### **Lumen Output**

W+RGB: 5,250 lm (100W), 8,420 lm (160W) W+Hue: 6,620 lm (100W), 9,940 lm (150W)

#### Dimming


DMX: High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)

Color Quality CRI 85	<b>Rated Life</b> > 100,000 Hours (L70)		
Finish	Color Temperature		
Black Wh	+ W Archi-Color™		

## Optics



## Mounting



## Warranty

5 Year limited warranty

## Listing



# Powerful color changing performance in a new smaller form factor.

The Atria 8 cylinder is a new high-performing cylinder addition to the series, that features the Archi-Color™ W+RGB and W+Hue options. This unique color changing technology offers an enhanced commercially viable option compared to other RGBW options in the market.

Boasting a delivered lumen package of up to 6,700lm in White light, and 4,000 lm in RGB, the Atria 8 is perfectly suited for houses of worship, convention centers, museums, casinos, and theatrical applications.











ME		DATE	
		QUANTITY	
figurator function on	this page works only with the latest vers	sion of Chrome or Adobe Acrobat Read	ler.
MODEL	ATRIA 8		
WATTAGE	100 100W	<b>150</b> 150W	160 160W
CCT/CRI	308C¹ 3000K +RGB / CRI 85 Archi-Color™ W+RGB	<b>308U</b> <sup>2</sup> 3000K +RGB / CRI 85 Archi-Color™ W+Hue	
VOLTAGE	UNV 120 – 277V		
DIMMING	DMX DMX dims to 0.1% (XLR Sockets)	DMXR DMX dims to 0.1% (RJ45 Sockets)	DMXP DMX dims to 0.1% (Terminal Block)
BEAM ANGLE	<b>45</b> 45°	<b>55</b> 55°	WD³ Wide
FINISH	BLK Black	WHT White	
RIM FINISH	STD Standard	GLR Glow Ring	
MOUNTING	ST2 Stem 2ft SAD10 Sloped Adjustable Cable 10ft SUM Surface Mount	ST4 Stem 4ft YKM Yoke Mount	AD10 Adjustable Cable 10ft WLM <sup>4</sup> Wall Mount
ACCESSORIES	SPD <sup>5</sup> Surge Protector FCS Field Cut Stem Adapter Kit	HC <sup>6</sup> Honeycomb Louver	CT <sup>7</sup> Conduit Mount
	figurator function on MODEL WATTAGE CCT / CRI VOLTAGE DIMMING BEAM ANGLE FINISH RIM FINISH MOUNTING	figurator function on this page works only with the latest versions  MODEL ATRIA 8  WATTAGE 100 100W  CCT / CRI 308C¹ 3000K +RGB / CRI 85 Archi-Color™ W+RGB  VOLTAGE UNV 120 − 277V  DIMMING DMX DMX dims to 0.1% (XLR Sockets)  BEAM ANGLE 45 45°  FINISH BLK Black  RIM FINISH STD Standard  MOUNTING ST2 Stem 2ft SAD10 Sloped Adjustable Cable 10ft SUM Surface Mount  ACCESSORIES SDDs Surge Protector	QUANTITY  figurator function on this page works only with the latest version of Chrome or Adobe Acrobat Read  MODEL ATRIA 8  WATTAGE 100 100W 150 150W  CCT / CRI 308C¹ 3000K +RGB / CRI 85 Archi-Color™ W+RGB Archi-Color™ W+Hue  VOLTAGE UNV 120 - 277V  DIMMING DMX DMX dims to 0.1% (RJ45 Sockets)  BEAM ANGLE 45 45° 55 55°  FINISH BLK Black WHT White  RIM FINISH STD Standard GLR Glow Ring  MOUNTING SAD10 Sloped Adjustable Cable 10ft SUM Surface Mount  SPD® Surge Protector HC® Honeycomb Louver

# () CLEAR FORM

<sup>&</sup>lt;sup>1</sup> Option is only compatible with 100, 160 Wattage options

<sup>&</sup>lt;sup>2</sup> Option is only compatible with 100, 150 Wattage options

<sup>&</sup>lt;sup>3</sup> Please factor in change in lumen output of -20% with WD

<sup>&</sup>lt;sup>4</sup> Wall Mount DMX does not include XLR / RJ45 sockets

<sup>&</sup>lt;sup>5</sup> Surge protector for up to 10KV. Applicable for unstable mains or facilities using high power machineries

<sup>&</sup>lt;sup>6</sup> Please factor in change in lumen output of -30%

<sup>&</sup>lt;sup>7</sup> CT only compatible with ST and AD mounting types



ATRIA 8 HIGH-PERFORMANCE VERSATILE CYLINDER



### **TECHNICAL DETAILS**

#### **Electrical**

- · Archi-Color™ W+RGB: 5,250 lm (100W | White = 50W, RGB = 50W) 8,420 lm (160W | White = 80W, RGB = 80W)
- · Archi-Color™ W+Hue: 6,620 lm (100W | White = 66W, HSV = 33W) 9,940 lm (150W | White = 100W, HSV = 50W)
- · Power Input: Universal (120-277V)
- · Operating Temperature: -13°F~112°F
- · Surge Protection: Built-in is 4KV
- Power Factor Greater than 0.9

#### **LED Features**

- · Color Temperature: 3000K + Archi-Color™ W+RGB / W+Hue
- · Long lasting LED luminaire tested under TM21 lumen maintenance L70 @ 100,000 Hrs
- · Lumen Maintenance > 0.90 at 60,000 hours

#### Optics

- · Aluminum Reflector
- · Beam Angle: 45°, 55°, WD

## **Advanced Dimming**

- Proprietary VX Driver™ is incorporated to all dimming options for video flicker-free lighting
- · DMX: High resolution dims to 0.1% (Supports ANSI E1.20 RDM protocol)
- · DMXP DMX dims to 0.1% (Terminal Block)

### Housing

- · Diameter: Ø8.1"
- · Height: 21.5"
- · Material: High Pressure Aluminum, Metal Reflector
- · Weight: 20 lbs

### Mounting

- · Stem 2ft or 4ft; 45° Swivel Canopy Included
- · Adjustable Cable 10ft
- · Sloped Adjustable Cable 10ft
- · Surface Mount
- · Yoke Mount
- · Wall Mount

#### Warranty

· 5-year limited warranty

#### Listing

- · ETL Damp Location Listed
- · CE
- · UKCA
- · FCC





# **PERFORMANCE SUMMARY\***

Lumen Performance (W+RGB)					
100W	R	G	В	W	
10000	220lm	1,440lm	130lm	3,460lm	
160W	R	G	В	W	
10044	350lm	2,310lm	210lm	5,550lm	

Wattage (W+RGB)						
Channel R G B W						
100W	16W	16W	16W	50W		
160W	26W	26W	26W	80W		

Lumen Performance (W+Hue)					
100W	R	G	В	W	
10000	350lm	2,120lm	230lm	4,500lm	
150W	R	G	В	W	
ISOVV	530lm	3,180lm	350lm	6,760lm	

Wattage (W+Hue)						
Channel HSV* W						
100W	33W	66W				
150W	50W	100W				


<sup>\*</sup>The output power of any color generated through the three channels of HSV.


<sup>\*</sup>Beam Angle: 55° \* Tolerance ±8%


Current Consumption				
Voltage 120V 277V				
100W	0.91A	0.39A		
150W	1.4A	0.60A		
160W	1.5A	0.64A		

# **PHOTOMETRICS**

Below is a typical photometric representation of the Atria 8 fixture. Please download IES files to ensure exact photometric value.











# **DMX REQUIREMENTS**

The Atria 8 Archi-Color™ fixture with DMX is a **four channel dmx** unit. When placing an order, please indicate DMX address. (The DMX address will be listed on the back of the fixture). Do not connect more than 32 fixtures per DMX daisy chain.

DMX Address (W+RGB)					
Channel	Red Control (ex. X)	Green Control (ex. X+1)	Blue Control (ex. X+2)	White Control (ex. X+3)	
#1	1	2	3	4	
#2	5	6	7	8	
#3	9	10	11	12	


DMX Address (W+Hue)					
Channel Fixture	Hue (H)	Saturation (S)	Value / Intensity (V)	White Control (W)*	
#1	1	2	3	4	
#2	5	6	7	8	
#3	9	10	11	12	

<sup>\*</sup>The White Control channel adjusts the brightness of 3000K LEDs.

## **DMX REQUIREMENTS**

The fixture can be connected with RJ45 or XLR sockets. DMX cables **are not** included; please refer to compatible DMX cabling list for more information. The final fixture on each daisy chain should be terminated by the use of a DMX terminator purchased from a 3rd party or from Meteor.

CONNECTION	RJ45 (CAT5e)	5-PIN XLR
Common	WHITE/BROWN(PIN7) & BROWN (PIN 8)	PIN 1
Signal -	ORANGE (PIN 2)	PIN 2
Signal +	WHITE/ORANGE (PIN 1)	PIN 3
Spare	-	PIN 4
Spare	-	PIN 5







XLR Sockets





## **COMPATIBLE DMX CABLING LIST**

DMX uses a cable consisting of two twisted pairs plus a shield to carry data. The cable must be specifically impedance matched for the digital DMX signal, meaning that microphone cable or other non-rated cable must not be used to carry DMX. Network cable (Cat5, 5e or 6 cable) may be used to carry DMX in an installation; however special consideration must be given to shielding and termination. Under no circumstances should solid core cable like Cat5 be terminated into a screw down connector.

Meteor recommends the use of Belden 9729 or Belden 9841 for DMX installation. Belden 9729/9841 is a two pair cable, which allows for a spare pair for 'out and back' type terminations if needed.

## **COLOR TEMPERATURE CHART**

This color temperature chart provides the precise values required to recreate specific color temperatures.


Color Temperature Chart (W+Hue)					
Channel	1	2	3	4	
COLOR/CCT	Hue (H)	Saturation (S)	Value / Intensity (V)	White Control (W)*	
RED	0	255	255	0	
GREEN	85	255	255	0	
BLUE	170	255	255	0	
1900K	16	255	255	90	
2700K	22	255	255	200	
3000K	28	255	255	255	
3500K	42	225	255	255	
4000K	70	165	255	255	
4500K	85	150	255	255	
5000K	120	215	255	255	
6500K	132	255	255	237	


<sup>\*</sup>The White Control channel adjusts the brightness of 3000K LEDs.






## **DIMENSIONS\***

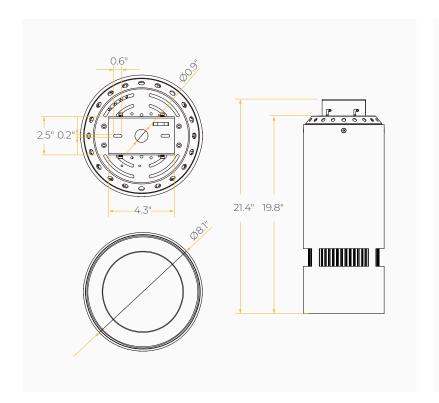

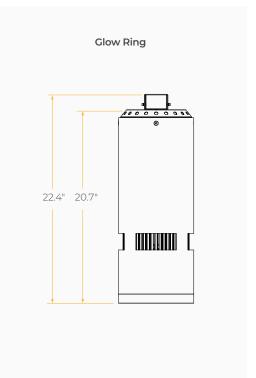

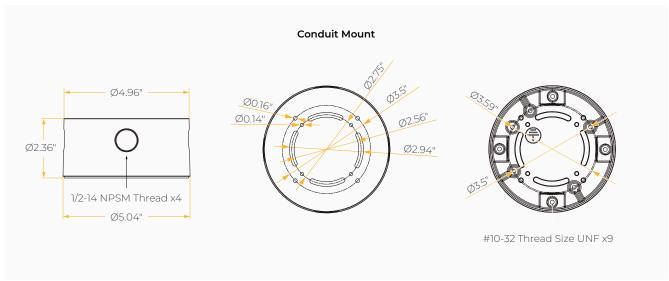



HIGH-PERFORMANCE VERSATILE CYLINDER



# **MOUNTING OPTIONS\***

\*Junction box not included

